



Know Your Motion

Measure it easily and accurately with an Endevco 6DoF sensor

The Model 7360A is a six degrees of freedom (6DoF) sensor that provides analog output for three axes of linear acceleration and three axes of angular rate in a compact, roughly one inch cube package. A sensor with analog output offers the advantage of being able to troubleshoot the data to its source and examine the output compared to its time history. As opposed to inertial measurement units (IMU's) where the information has been digested and presented in a take-it-or-leave-it fashion, which is not user-friendly in a test and measurement or R&D environment.

In typical dynamic measurements, acceleration and angular rate data are essential parameters needed to fully characterize the complex behavior of a moving object. Until recently, engineers can only conveniently gather information using linear accelerometers because the massive array of sensors required to collect rotational data was impractical due to the expense and space required. With this new 6DoF sensor, professionals in automotive and aircraft development are now able to measure linear and rotational dynamics that previously required multiple sensors and much more space. Rather than having to make assumptions about these dynamic interactions, the 7360A provides reliable, empirical data to support the analytical results. In addition, the close proximity of all the CSM's (centers of seismic mass) allows for superior approximation of the vehicle/body dynamics. What makes the 7360A truly unique is that it offers low acceleration ranges and low angular rate ranges most suitable for accurately characterizing motion.



APPLICATIONS

- Vehicle dynamics
- Aircraft flight testing
- Spacecraft and satellite
- Missile testing
- Automotive rollover

ENDEVCO www.endevco.com Tel: +1 (866) ENDEVCO [+1 (866) 363-3826]


Piezoelectric accelerometers | Piezoresistive accelerometers | IEPE accelerometers | Variable capacitance accelerometers | Piezoresistive pressure sensors | Piezoelectric pressure sensors | High intensity microphones | Inertial sensors | Signal conditioners and supportive instrumentation | Cable assemblies

Accelerometers for motion and vibration measurements



7360A

Description	Six degrees of freedom sensor Compact package with 2 cables Option M1 for 5V
Shock limit g	5000
Operating temperature °C (°F)	-40 to +100 (-40 to +212)
Dimensions mm (in)	30.5 x 30.5 x 27.9 (1.2 x 1.2 x 1.1)
Weight grams (without cables)	35
Cable type	2 cables, 12x #30AWG Cond PFA insulated, braided shield, PU jacket
Humidity	IP67
Accelerometer excitation voltage Vdc	7 to 36 or 5V [M1 option]
Rate excitation voltage Vdc	5 to 16
Mounting method	4-40 screws

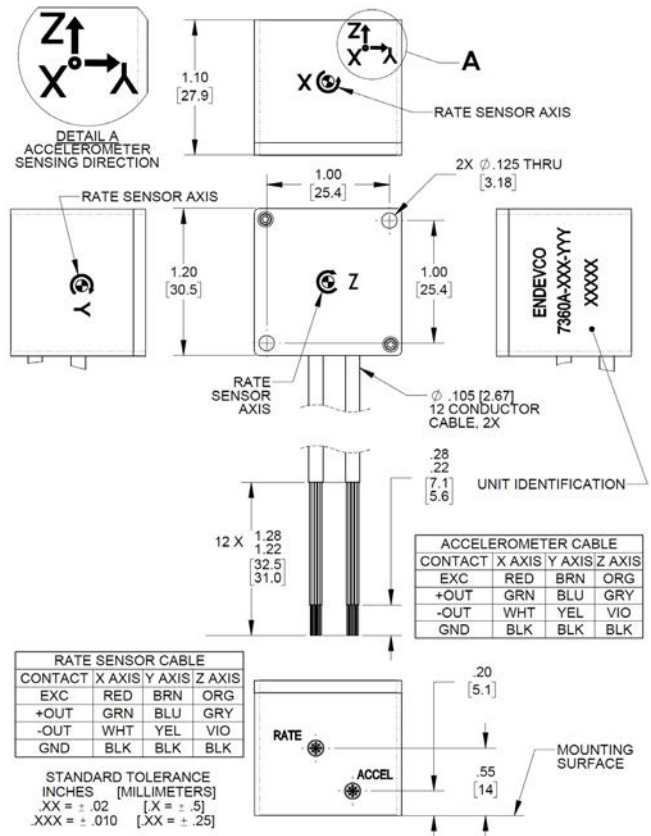

Accelerometer		-2	-10	-50	-200	-500
Range	g	±2	±10	±50	±200	±500
Sensitivity	mV/g	1000	200	40	10	4
(tolerance)	mV/g	±50	±10	±2	±1.0	±0.3
Frequency response						
(±1dB, ref 100 Hz) max	Hz	0-300	0-1500	0-1800	0-1800	0-1800
(±3dB, ref 100 Hz) typical	Hz	0-550	0-2500	0-2800	0-5000	0-5000
Zero measurand output	mV	±50	±50	±50	±50	±50
Transverse sensitivity (typical)	%	3.0	3.0	3.0	3.0	3.0
Thermal zero shift (max)	%FSO	±2.0	±2.0	±2.0	±2.0	±2.0
-40°C to +100°C (-40°F to +212°F)						
Thermal sens shift (max)	%	±2.0	±2.0	±2.0	±2.0	±2.0
-40°C to +100°C (-40°F to +212°F)						
Combined non-linearity and hysteresis (typical)	%FSO	±0.5	±0.5	±0.5	±0.5	±1
Threshold (resolution) [2]	equiv. g's	.0002	.001	.005	.02	.05

Angular rate sensor		-100	-500	-1K5	-8K	-12K	-18K
Range	deg/sec	±100	±500	±1500	±8000	±12000	±18000
Sensitivity (±15%)	mV/deg/sec	20	4	1.333	0.25	0.167	0.111
Frequency response							
(+1dB/-3dB, ref 100 Hz)	Hz	0-1000	0-1000	0-1000	0-1000	0-2000	0-2000
Cross axis sensitivity	%	<1	<1	<1	<1	<1	<1
Thermal zero shift (max)	%FSO	±2.5	±2.5	±2.5	±2.5	±2.5	±2.5
-40°C to +105°C (-40°F to +221°F)							
Thermal sens shift (max)	%	±2.0	±2.0	±2.0	±2.0	±2.0	±2.0
-40°C to +105°C (-40°F to +221°F)							
Zero measurand output	mV	±100	±100	±100	±100	±100	±100
Non-linearity (max)	%FSO [1]	±0.5	±0.5	±0.5	±0.5	±0.5	±0.5
Residual noise (passband)	mV RMS	3.4	3.2	2.5	2.1	1.8	1.8



10869 NC Highway 903, Halifax, NC 27839 USA

endevco.com | sales@endevco.com | 866 363 3826

© 2021 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevco), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at www.pcb.com/trademarkownership.

101921

Aufgrund laufender Weiterentwicklungen sind Änderungen der Spezifikationen vorbehalten. Alle Angaben vorbehaltlich Satz- und Druckfehler.

nbn Austria GmbH

Riesstraße 146, 8010 Graz

Tel. +43 316 40 28 05 | Fax +43 316 40 25 06

nbn@nbn.at | www.nbn.at

