



MODELS
637A06 & 638A06

CRYOGENIC ICP® ACCELEROMETERS



- Specialized cryogenic circuitry & quartz sensing technology to promote survivability in extremely cold applications.
- Electrically-isolated housing to prevent noise issues without the addition of an isolation base.
- Welded, hermetically-sealed housing of 316L stainless steel & rugged two-pin MIL connector to withstand harsh industrial environments.

TYPICAL APPLICATIONS

- Cryogenic Centrifugal and Reciprocating Pumps for:
 - Liquefied natural gas (LNG) processing
 - Industrial gas processing
 - Pharmaceutical production
 - Frozen food production/storage

CE


DESIGNED FOR USE IN INDUSTRIAL ENVIRONMENTS DOWN TO -320 °F

Cryogenic ICP® accelerometers are specifically designed to operate in environments down to -320 °F (-196 °C) F with the use of specialized, built-in, cryogenic circuitry and a quartz shear sensing technology. Each sensor is hermetically-sealed in a 316L stainless steel housing. They are individually tested to determine the thermal coefficient of sensitivity at -320 °F (-196 °C) ensuring reliable operation.


pcb.com | 1 800 959 4464

SPECIFICATIONS

Model Number	637A06	638A06
Performance		
Sensitivity	25 mV/g 2.54 mV/(m/s ²)	25 mV/g 2.54 mV/(m/s ²)
Measurement Range	±200 g pk ±1962 m/s ²	±200 g pk ±1962 m/s ²
Frequency Range (±5%)	10 to 400 Hz	10 to 400 Hz
Frequency Range (±3 dB)	4 to 1500 Hz	4 to 1500 Hz
Filter Type	Low Pass	Low Pass
Electrical Filter Corner Frequency	1.5 kHz	1.5 kHz
Electrical Filter Roll-Off	12 dB/octave	12 dB/octave
Resonant Frequency	≥ 20 kHz	≥ 20 kHz
Broadband Resolution	1 mg rms 0.01 m/s ² rms	1 mg rms 0.01 m/s ² rms
Non-Linearity	±1%	±1%
Transverse Sensitivity	≤5%	≤5%
Environmental		
Overload Limit (Shock)	±1000 g pk ±9810 g pk	±1000 g pk ±9810 g pk
Temperature Range	-320 to +250 °F -196 to +121 °C	-320 to +250 °F -196 to +121 °C
Electrical		
Settling Time	≤ 3 sec	≤ 3 sec
Discharge Time Constant	0.05 to 0.5 sec	0.05 to 0.5 sec
Excitation Voltage	18 to 28 VDC	18 to 28 VDC
Constant Current Excitation	1.6 to 20 mA	1.6 to 20 mA
Output Impedance	≤ 100 Ohm	≤ 100 Ohm
Output Bias Voltage	7 to 11 VDC	7 to 11 VDC
Spectral Noise (1 Hz)	600 µg/√Hz	600 µg/√Hz
Spectral Noise (10 Hz)	120 µg/√Hz	120 µg/√Hz
Spectral Noise (100 Hz)	36 µg/√Hz	36 µg/√Hz
Spectral Noise (1 kHz)	25 µg/√Hz	25 µg/√Hz
Spectral Noise (10 kHz)	6 µg/√Hz	6 µg/√Hz
Electrical Isolation (Case)	Case Isolated	Case Isolated
Physical		
Sensing Element	Quartz	Quartz
Sensing Geometry	Shear	Shear
Housing Material	Stainless Steel	Stainless Steel
Sealing	Welded Hermetic	Welded Hermetic
Mounting Thread	¼-28 Female	¼-28 Male
Mounting Torque	2 to 5 ft-lb 2.7 to 6.8 Nm	2 to 5 ft-lb 2.7 to 6.8 Nm
Electrical Connector	2-pin MIL-C-5015	2-pin MIL-C-5015
Electrical Connector Position	Top	Side
Size	0.88 x 2.06 in 22.0 x 52.3 mm	1.00 x 2.25 x 1.00 in 25.4 x 57.4 x 25.4 mm
Weight	3.3 oz 94 gm	6.4 oz 181 gm

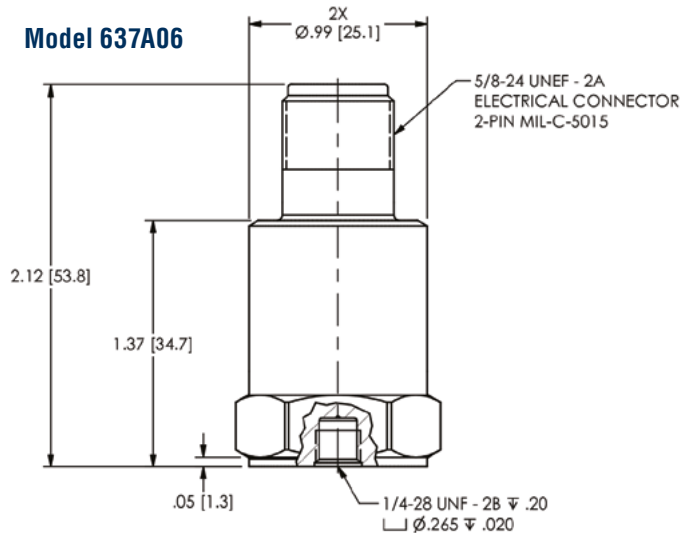

Model 638A06

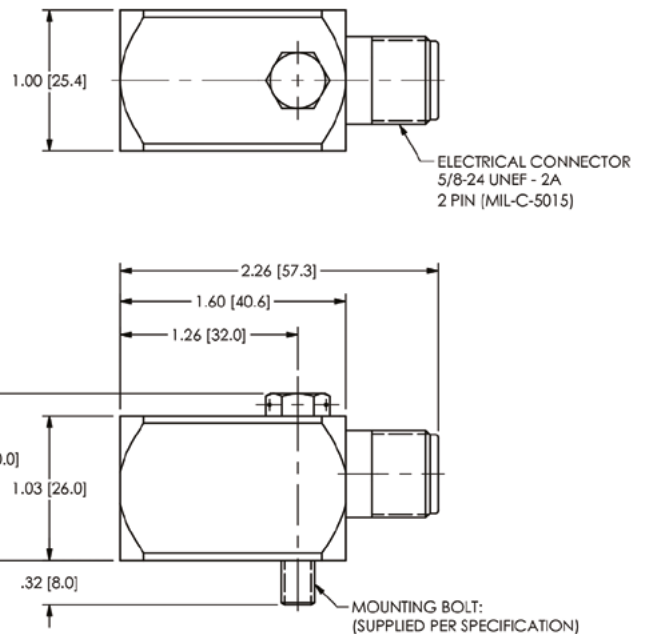

IMI-VIB-637A06-638A06-1218

MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.

Aufgrund laufender Weiterentwicklungen sind Änderungen der Spezifikationen vorbehalten. Alle Angaben vorbehaltlich Satz- und Druckfehler.

v190225

nbn Austria GmbH

Riesstraße 146, 8010 Graz

Tel. +43 316 402805 | Fax +43 316 402506

nbn@nbn.at | www.nbn.at

nbn