


General Specifications

415940, 415941 and 415942
Shunt Resistor for Screw Input Terminal

GS 04L69A01-91EN

■ Overview

415940, 415941 and 415942 are precision shunt resistors, to convert DC current signal to DC voltage.



■ Model and Suffix Codes

Model	Description
415940	250 ohm resistance (for 3 mm screws)
415941	100 ohm resistance (for 3 mm screws)
415942	10 ohm resistance (for 3 mm screws)

■ Items to Specify when Ordering


Clearly state the model.

■ Characteristics

Resistance Tolerance	: $\pm 0.1\%$
TCR (ppm/°C)	: ± 25 ppm/°C
Rated Power	: 0.3 W
Allowable maximum current	: Model 415940: 35mA, Model 415941: 55mA, Model 415942: 173mA
Recommended input current	: Model 415940: 4-20mA, Model 415941: 10-50 mA, Model 415942: 4-20mA/10-50mA
Rated Ambient Temperature	: 70 °C
Operational Temperature Range	: -25 to +80 °C
Storage Temperature Range	: -40 to +85 °C

■ External Dimensions

Unit: mm

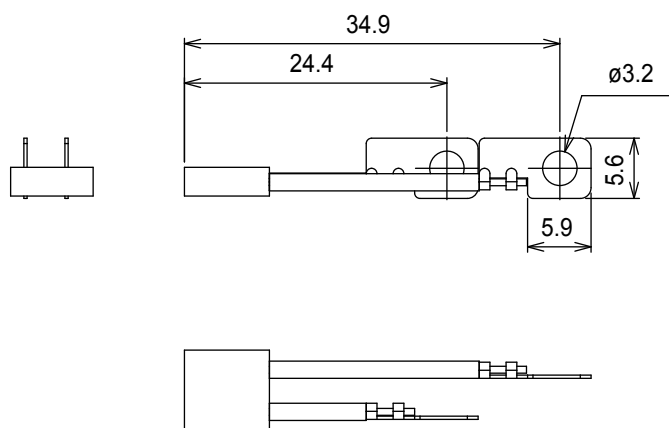

YOKOGAWA ◆

Yokogawa Electric Corporation
2-9-32, Nakacho, Musashino-shi, Tokyo, 180-8750 Japan

GS 04L69A01-91EN
©Copyright Dec. 2016 (YK)

Aufgrund laufender Weiterentwicklungen sind Änderungen der Spezifikationen vorbehalten. Alle Angaben vorbehaltlich Satz- und Druckfehler.

nbn Austria GmbH

Riesstraße 146, 8010 Graz

Tel. +43 316 40 28 05 | Fax +43 316 40 25 06

nbn
nbn@nbn.at | www.nbn.at