Explosive, Gun & Impact Testing

Accelerometers, Pressure Sensors, Force & Strain Sensors, Cables/Connectors, and Signal Conditioning for Blast, Ballistics and Shock Measurement

Aerospace & Defense Division

PCB PIEZOTRONICS INC.
MTS SYSTEMS CORPORATION
www.pcb.com

Vertrieb für Österreich:

www.nbn.at

nbn Elektronik Handelsgesellschaft m.b.H.
Riesstraße 146, 8010 Graz | Tel. +43 316 40 28 05 | Fax +43 316 40 25 06

nbn

Explosive, Gun & Impact Testing

Sensors for Blast Measurements

Shock Accelerometers: Our high amplitude shock accelerometers represent state-of-the-art industry technology for miniature, high amplitude, DC response acceleration sensors, capable of measuring long duration transient motion, as well as responding to and surviving extremely fast rise times typical of a high-G shock event. Both a packaged and an OEM configuration are offered to fulfill a variety of installation requirements.

Pressure Sensors: Our pressure sensors are designed for a broad range of explosion, blast, and shock wave testing. They are frequency tailored to capture both peak pressure and total impulse measurements. Applications include measuring air-blast pressure in free-field or closed bunker arenas to obtain peak pressure, total impulse, shock wave and time-of-arrival measurements often used to study blast effects on structures, vehicles, or other objects.

In this catalog, you will find a listing of PCB®'s most popular blast, high-G shock sensors and other hardware for these applications. Please log onto www.pcb.com, and search the model series for detailed specifications. You can also contact us at 866-816-8892, or aerosales@pcb.com, to discuss your specific requirement with an Application Engineer.

Applications:

Civilian applications of various types of chemical explosives include:

- Mining
- Construction
- Demolition
- Pyrotechnics

Defense applications of explosives encompass:

- Aerial Bombs
- Mines
- Torpedoes
- Breeching Operations
- Ballistics
- Tactical Missiles & More

Table of Contents

MEMS High-G Shock Accelerometers ..... pg. 3
- MEMS High-G Accelerometers/Commercial Series 3501 & 3503 ..... pg. 4
- MEMS High-G Accelerometers/ITAR Series 3991 ..... pg. 6

Piezoelectric Accelerometers ..... pg. 8
- Low Cost, Embeddable Accelerometers Series 660 ..... pg. 8
- High Amplitude ICP® Shock Accelerometers Series 350 ..... pg. 10

Pressure Products for Blast Testing ..... pg. 11
- High Frequency Series 113B ..... pg. 12
- Ground Isolated Series 102B ..... pg. 13
- ICP® High Intensity, Acoustic Sensors Series 106B ..... pg. 14
- Time of Arrival ICP Micro-pressure Sensors Series 132 ..... pg. 15
- Tourmaline Pressure Bar Series 134 ..... pg. 15
- Free Field Blast Pressure Pencil Probe Series 137 ..... pg. 16
- Tourmaline Underwater Blast Series 138 ..... pg. 17

Pressure Products for Ballistic Testing ..... pg. 18
- ICP® Ballistic Sensors Series 109 ..... pg. 19
- Charge Mode Ballistic Sensors Series 119 ..... pg. 19
- Conformal Ballistic Sensors Series 117B ..... pg. 20
- Shot Shell Sensor Series 165B02 ..... pg. 21

Force & Strain Products for Structural Impact ..... pg. 22
- Impact Force Sensors 201B and 208C ..... pg. 22
- Dynamic Force Strain 740B02 ..... pg. 23

Placebo Transducers ..... pg. 24

Calibration Products ..... pg. 25
- Calibration Systems ..... pg. 25
- Special Purpose ..... pg. 25
- Shock Accelerometer Calibration Model 9525C ..... pg. 26

Specialized Instrumentation ..... pg. 27
- Firearms Detection Systems Model 831 ..... pg. 27
- Ballistic Peak Pressure Monitoring System Model 444A53 ..... pg. 27

Signal Conditioning and Converters ..... pg. 28

Cables and Adapters ..... pg. 30
- Coaxial Cable Assemblies ..... pg. 31
- 4-Conductor Cable Assemblies ..... pg. 32
- Custom Cable Assemblies ..... pg. 33
- Cable Connectors ..... pg. 34
- Coaxial Custom Cable Assemblies ..... pg. 35
- Multi-conductor Custom Cable Assemblies ..... pg. 35
- Multi-conductor Cables ..... pg. 36
- Patch Panels ..... pg. 36
- Connector Adapters ..... pg. 37

Services and Qualifications ..... pg. 38

PCB Divisions ..... pg. 39

MEMS High-G Shock Accelerometers

Four-wire Full Bridge

Piezoresistive shock accelerometers, manufactured by MEMS technology, have low power consumption while still providing +/- 200 mV full scale output at acceleration levels greater than 50 kg. The accelerometers are electrically compatible with the same type 4-wire circuit used to condition a strain gauge full bridge and since they have much greater output compared to a strain gauge, the requirement for signal amplification is greatly reduced. They afford a wider operating temperature range when compared to mechanically isolated ICP® accelerometers. Their frequency response, dependent on model, can be uniform from DC (0 Hz) to values as high as 20 kHz. To lessen the severity of response when their resonant frequency is excited, they incorporate squeeze film damping, achieving values of 0.02 to 0.06 of critical. These damping values are much higher than those found in legacy MEMS accelerometers. Since silicon is a brittle material, over range stops are also incorporated to minimize breakage of the sensing element, and then the sensing element is sealed within a hermetic package. At comparable G levels, MEMS technology enables the smallest package size to be attained for individual accelerometers.

Highlights:

- Single axis and triaxial arrangements
- Mechanical over-range stops improves survivability
- Slight damping reduces resonance amplification
- Excellent amplitude linearity
- Low power consumption

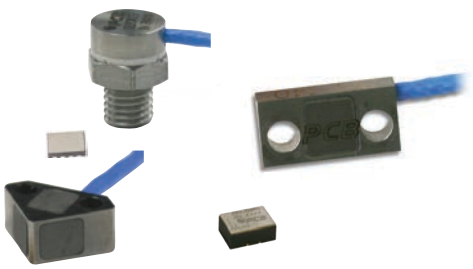

Series 3501, 3503 & 3991 MEMS High-G Shock Accelerometers

Series 3501 & 3503

MEMS High-G Shock Accelerometers/Commercial

Applications

- Consumer Electronics Testing
- Pile Drivers (e.g. piles for a pier into the ocean)
- Down-hole Oil Exploration
- Shot Counting for Rifles and Handguns
- Jack Hammer Manufacturers
- Golf Driver Head Measurements
- Not Restricted Under ITAR

Model Numbering System for Series 3501 and 3503 MEMS High-Amplitude Shock Accelerometers

Single Axis Series 3501							
3501B	Single axis, MEMS DC response shock accelerometer						
	1.) Configurations						
	12 20	Titanium housing, mounted with integral 1/4-28 thread stud, side cable exit Housed in a SMT leadless chip carrier to facilitate surface mount installation					
		2.) Measurement Range					
		2 KG 20KG 60KG	±2,000 G ±20,000 G ±60,000 G				
			3.) Integral Cable Length for configuration 3501A12XXG and 3501A13XXG (add only if other than standard length shown above)				
			/ XXX	Specify XXX, as desired in feet			
				4.) Cable Termination (add only if selecting other than pigtail connection)			
				LN	Mini 8-pin DIN connector		
				AY	4-pin plug		
Triaxial Series 3503							
3503A	Triaxial, MEMS DC response shock accelerometer						
	1.) Configurations						
	11 20	Titanium housing, two through-holes for 4-40 mounting bolts Incorporates three flip chip elements attached to a SMT leadless chip carrier to facilitate surface mount installation					
		2.) Measurement Range					
		2 KG 20KG 60KG	±2,000 G ±20,000 G ±60,000 G				
			3.) Integral Cable Length for configuration 3503A10XXG only (add only if other than standard length shown above)				
			/ XXX	Specify XXX, as desired in feet			
				4.) Cable Termination (add only if selecting other than pigtail connection)			
				LY	(3) LN Mini 8-pin DIN connectors in a triple splice		
Examples							
3501B	12	20KG			Single axis, titanium housing, mounted with integral 1/4-28 thread stud, side cable exit, 20,000 G range		
3503A	11	60KG	/020	LY	Triaxial, titanium housing, two through-holes for 4-40 mounting bolts, 60,000 G range, 20 ft (6.1m) cable terminating with (3) LN mini 8-pin DIN connectors		

MEMS High-Amplitude Shock Accelerometers

Series 3501 and 3503	Surface Mount		Packaged	
Model Number	3501A2020KG Single Axis	3503C2020KG Triaxial	3501B1220KG Single Axis	3503A1120KG Triaxial
Sensitivity (± 20%) (@ typical excitation)	0.010 mV/g	0.010 mV/g	0.010 mV/g	0.010 mV/g
Sensitivity	0.001 mV/V/g	0.001 mV/V/g	0.001 mV/V/g	0.001 mV/V/g
Measurement Range	± 0 to 20,000 g	± 0 to 20,000 g	± 0 to 20,000 g	± 0 to 20,000 g
Frequency Range (± 1dB)	10k Hz	10k Hz	10k Hz	10k Hz
Resonant Frequency	> 60k Hz	> 60k Hz	> 60k Hz	> 60k Hz
Overload Limit (Shock)	± 60,000 g pk	± 60,000 g pk	± 60,000 g pk	± 60,000 g pk
Overload Limit (Mechanical Stops)	≥ 30 kg	≥ 30 kg	≥ 30 kg	≥ 30 kg
Excitation Voltage (Typical)	10 VDC	10 VDC	10 VDC	10 VDC
Excitation Voltage (Max)	15 VDC	15 VDC	15 VDC	15 VDC
Temperature Range (Operating)	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C
Physical				
Size (Height x Length x Width)	0.085 x 0.236 x 0.138 in 2.16 x 3.5 x 6 mm	0.12 x 0.15 x 0.15 in 3 x 3.8 x 3.8 mm	0.5 x 0.375 hex in 12.7 x 9.5 hex mm	0.25 x 0.47 x 0.47 in 6.35 x 11.8 x 11.8 mm
Weight	0.005 oz (0.15 gm)	0.003 oz (0.1 gm)	0.11 oz (3 gm)	0.09 oz (2.8 gm)
Mounting	Adhesive Mount	Adhesive Mount	1/4-28 stud	(2) Through-holes
Housing	Alumina	Alumina	Titanium	Titanium
Cable Length	N/A	N/A	10 ft (3m)	10 ft (3m)
Electrical Connection	Surface Mount (SMT)	Surface Mount (SMT)	034 Teflon, Integral Cable	Integral Cable (8 conductor)
Cable Termination	N/A	N/A	Pigtails	Pigtails
Supplied Accessories				
Mounting Screw	N/A	N/A	Integral Stud	(2) Model 081Axxx (4+40 x 3/8" SHCS)
Calibration Certificate	ACS-62 Shock Calibration	ACS-62 Shock Calibration	ACS-62 Shock Calibration	ACS-62 Shock Calibration
Additional Versions				
Metric Mount	—	—	M3501A1220KG	—

Model Number	3501A2060KG Single Axis	3503A2060KG Triaxial	3501A1260KG Single Axis
Sensitivity (± 20%) (@ typical excitation)	0.003 mV/g	0.003 mV/g	0.003 mV/g
Sensitivity	0.0003 mV/V/g	0.0003 mV/V/g	0.0003 mV/V/g
Measurement Range	± 0 to 60,000 g	± 0 to 60,000 g	± 0 to 60,000 g
Frequency Range (± 1dB)	20k Hz	20k Hz	20k Hz
Resonant Frequency	>120k Hz	>120k Hz	>120k Hz
Overload Limit (Shock)	± 100,000 g pk	± 100,000 g pk	± 100,000 g pk
Overload Limit (Mechanical Stops)	≥ 100 kg	≥ 100 kg	≥ 100 kg
Excitation Voltage (Typical)	10 VDC	10 VDC	10 VDC
Excitation Voltage (Max)	15 VDC	15 VDC	15 VDC
Temperature Range (Operating)	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C
Physical			
Size (Height x Length x Width)	0.085 x 0.236 x 0.138 in 2.16 x 3.5 x 6 mm	0.12 x 0.15 x 0.15 in 3 x 3.8 x 3.8 mm	0.5 x 0.375 hex in 12.7 x 9.5 hex mm
Weight	0.005 oz (0.15 gm)	0.003 oz (0.1 gm)	0.11 oz (3 gm)
Mounting	Adhesive Mount	Adhesive Mount	1/4-28 Stud
Housing	Alumina	Alumina	Titanium
Cable Length	N/A	N/A	10 ft (3m)
Electrical Connection	Surface Mount (SMT)	Surface Mount (SMT)	034 Teflon, Integral Cable
Cable Termination	N/A	N/A	Pigtails
Supplied Accessories			
Mounting Screw	N/A	N/A	Integral Stud
Calibration Certificate	ACS-62 Shock Calibration	ACS-62 Shock Calibration	ACS-62 Shock Calibration
Additional Versions			
Metric Mount	—	—	M3501A1260KG

Series 3991

MEMS High-G Shock Accelerometers/ITAR

Applications

- Safe and Arm
- Smart Fuzes
- Penetrator Tests
- Weapons Data Recorders / Launch Characteristics
- Explosive Environments (pyroshock)
- Metal-to-metal Impact / Armor Piercing
- Blast Loading of Structures / Nuclear Blast Survivability

Model Numbering System for Series 3991 High-Amplitude Shock Accelerometers

1.) Single Axis Series 3991							
3991A	Single axis, MEMS DC response shock accelerometer (revision A)						
	2.) Configurations						
	11	Titanium housing, 10 ft (3m) integral cable, 034 integral FEP cable, terminating in pigtails, two through-bolt mounting holes					
		3.) Measurement Range					
		2KG	±2,000 G				
		20KG	±20,000 G				
		60KG	±60,000 G				
			4.) Integral Cable Length (add only if selecting integral cable and other than standard length shown above)				
			/ XXX	Specify XXX as desired in feet			
				5.) Cable Termination (add only if selecting integral cable with other than pigtail connection			
				LN	Mini 8-pin DIN connector		
Examples							
3991A	11	60KG	/020	LN	Single axis, titanium housing, integral 4 conductor Teflon cable, 60,000 G range with 20 ft (6.1m) cable terminating with Mini 8-Pin DIN connector		

MEMS High-Amplitude Shock Accelerometers

MEMS High-Amplitude Shock Accelerometers

Model Number	3991B112KG	3991B1120KG	3991B1160KG
Sensitivity (± 20%) (@ 10VDC excitation)	0.020 mv/g	0.010 mv/g	0.003 mV/g
Sensitivity	0.02 mV/V/g	0.001 mV/V/g	0.0003 mV/V/g
Measurement Range	± 0 to 2000 g	± 0 to 20,000 g	± 0 to 60,000 g
Frequency Range (± 1 db)	10 kHz	10,000 Hz	20,000 Hz
Resonant Frequency	> 20k Hz	> 60k Hz	>120k Hz
Overload Limit (Shock)	± 10,000 g pk	± 60,000 g pk	± 100,000 g pk
Overload Limit (Mechanical Stops)	≥ 2.2 kg	≥ 30 kg	≥ 100 kg
Excitation Voltage (Typical)	10 VDC	10 VDC	10 VDC
Excitation Voltage (Max)	3.3 to 15 VDC	15 VDC	15 VDC
Temperature Range (Operating)	65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C
Physical			
Size (Height x Length x Width)	0.11 x 0.56 x 0.28 in 2.79 x 14.22 x 7.11 mm	0.11 x 0.56 x 0.28 in 2.79 x 14.22 x 7.11 mm	0.11 x 0.56 x 0.28 in 2.79 x 14.22 x 7.11 mm
Weight	0.045 oz 1.28 gm	0.045 oz 1.28 gm	0.045 oz 1.28 gm
Mounting	(2) Through-holes / Screws	(2) Through-holes / Screws	(2) Through-holes / Screws
Housing	Titanium	Titanium	Titanium
Cable Length	3 ft 0.91 m	10 ft 3 m	10 ft 3 m
Electrical Connection	094 Aramid, Integral Cable	034 FEP, Integral Cable	034 FEP, Integral Cable
Cable Termination	Pigtails	Pigtails	Pigtails
Supplied Accessories			
Mounting Screw	(2) Model 081A110 (4-40 x 1/4" SHCS)	(2) Model 081A110 (4-40 x 1/4" SHCS)	(2) Model 081A110 (4-40 x 1/4" SHCS)
Calibration Certificate	ACS-62 Shock Calibration	ACS-62 Shock Calibration	ACS-62 Shock Calibration

This product is a controlled item under the International Traffic in Arms Regulations (ITAR), administered by the Office of Defense Trade Controls. Any export of this product from the United States, including any item in which this product may be incorporated, requires appropriate authorization from the U.S. State Department.
Diversion contrary to U.S. law is prohibited.

Model 080A213

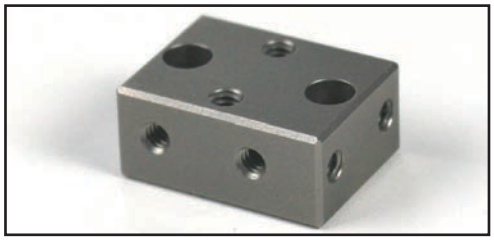

Triaxial mounting block for Models 3991A10X0KG and 3991A11X0KG

LN Mini 8-Pin DIN Connector

Bridge input mating connector

LY Mini 8-Pin DIN Connector

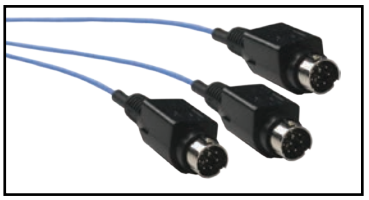

Bridge input mating connector

Piezoelectric Accelerometers

Series 660 (TO-5 Package)

Low Cost, Embeddable Accelerometers

Series 660 accelerometers are ideal for continuous vibration monitoring in high-volume and commercial OEM applications.

The Series 660 low cost accelerometers offer an affordable solution for vibration and shock measurements in high-volume and commercial OEM applications. The units are particularly well suited for shock and impact detection of packages or components, as well as bearing and gear mesh vibration measurements in predictive maintenance and condition monitoring requirements. The compact designs may be imbedded into machinery at the OEM level to provide value-added monitoring protection.

The units employ field-proven, solid-state, piezoelectric sensing elements for durability and broadband performance. Choose from either charge mode types, which achieve high operating temperatures or voltage mode ICP® types, with built-in signal conditioning microelectronics, for simplified operation and connectivity to data acquisition and vibration monitoring instrumentation.

Highlights:

- Choice of standard TO-5 or TO-8 transistor-style packages
- Choice of charge mode piezoelectric, voltage mode ICP®, and 3-wire low power varieties
- Mountable via adhesive or soldering and choice of either integral cable or solder pin electrical connections
- Variety of sensitivities to accommodate a wide variety of applications
- Broad bandwidth, high shock survivability, wide operating temperature range, high resolution, and large dynamic range

Options:

- Low Output Bias Voltage
- High Temperature Operation to 365 °F (185 °C)
- High Range (less sensitivity)
- Temperature Output Signal

Specifications

Package Size	Low Profile TO-5	TO-5
2-Wire ICP Configuration		
Primary Model Sensitivity (± 20%)	10 mV/g 1.02 mV/m/s²	100 mV/g 10.2 mV/m/s²
Measurement Range	500 g 5000 m/s²	50 g 500 m/s²
Frequency Range (± 3 dB)	0.4 to 10 k Hz	0.32 to 10k Hz
Resonant Frequency	>30 kHz	>25 kHz
Broadband Resolution	0.003 g pk	0.0003 g pk
Excitation Voltage	18 to 28 VDC	18 to 28 VDC
Excitation Constant Current	2 to 20 mA	2 to 20 mA
Output Impedance	<100 ohm	<100 ohm
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC
Discharge Time Constant	≥0.4 sec	≥0.5 sec
Settling Time	2 sec	2.5 sec
Operating Temperature Range	-65 to +185 °F -54 to +85 °C	-65 to +185 °F -54 to +85 °C
Weight	0.08 oz 2.2 gm	0.1 oz 3 gm
Other Available Sensitivities	1 mV/g 0.102 mV/m/s²	N/A
3-Wire, Low-Power Configuration		
Primary Model Sensitivity (± 20%)	10 mV/g 1.02 mV/m/s²	100 mV/g 10.2 mV/m/s²
Measurement Range *	200 g 2000 m/s²	20 g 200 m/s²
Frequency Range (± 3 dB)	0.32 to 10k Hz	0.32 to 10k Hz
Resonant Frequency	>30 kHz	>25 kHz
Broadband Resolution	0.003 g pk 0.03 m/s² pk	0.001 g pk 0.01 m/s² pk
Excitation Voltage	3 to 5 VDC	3 to 5 VDC
Current Draw	0.75 mA	0.75 mA
Output Impedance	< 100 ohm	< 100 ohm
Output Bias Voltage (±10%)	0.5 × Excitation Voltage	0.5 × Excitation Voltage
Discharge Time Constant	≥0.5 sec	≥0.5 sec
Settling Time	2.5 sec	2.5 sec
Operating Temperature Range	-65 to +185 °F -54 to +85 °C	-65 to +185 °F -54 to +85 °C
Weight	0.08 oz 2.2 gm	0.1 oz 3 gm
Charge Mode Configuration		
Sensitivity (± 20%)	5 pC/g 0.51 pC/m/s²	11 pC/g 1.12 pC/ms²
Measurement Range	500 g	50 g
Frequency Range (± 3 dB)	10 kHz	10 kHz
Resonant Frequency	>30 kHz	>25 kHz
Operating Temperature Range	-65 to +185 °F -54 to +85 °C	-65 to +185 °F -54 to +85 °C
Capacitance	350 pF	350 pF
Weight	0.08 oz 2.2 gm	0.1 oz 3 gm
Common Specifications		
Transverse Sensitivity	≤ 5%	≤ 5%
Non-Linearity	≤1%	≤1%
Temperature Coefficient	0.10 %/°F 0.18 %/°C	0.10 %/°F 0.18 %/°C
Shock Limit	7000 g pk 70k m/s² pk	7000 g pk 70k m/s² pk
Housing Material	Stainless Steel	Stainless Steel
Mounting	Adhesive or Solder	Adhesive or Solder
Sealing (welded)	Hermetic	Hermetic
Size	0.36 × 0.26 in 9.1 × 6.6 mm	0.36 × 0.38 in 9.1 × 9.7 mm

Note:

* Measurement range achieved is dependent upon excitation voltage supplied, i.e.: Measurement Range = $\frac{(0.5 \times \text{Excitation Voltage}) - 0.5\ \text{V}}{\text{Sensitivity (V/g)}}$

2-Wire ICP Mode

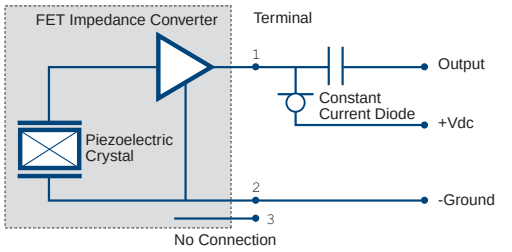

2-Wire Charge Mode

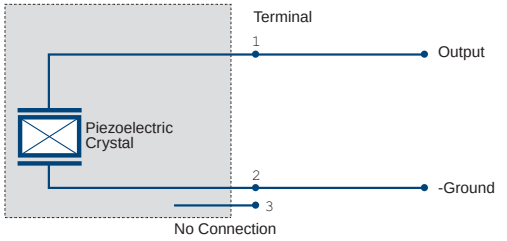

3-Wire Voltage Mode

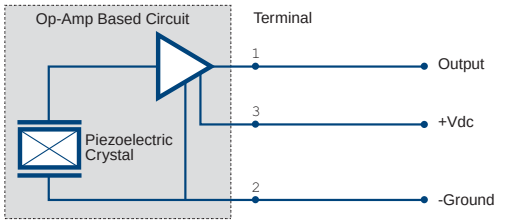

4-Wire Voltage Mode with Temperature Output

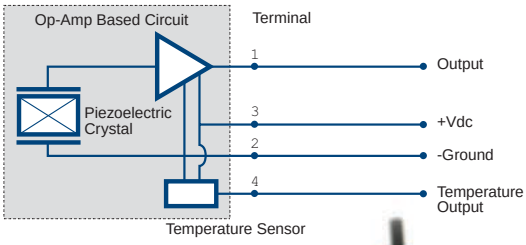

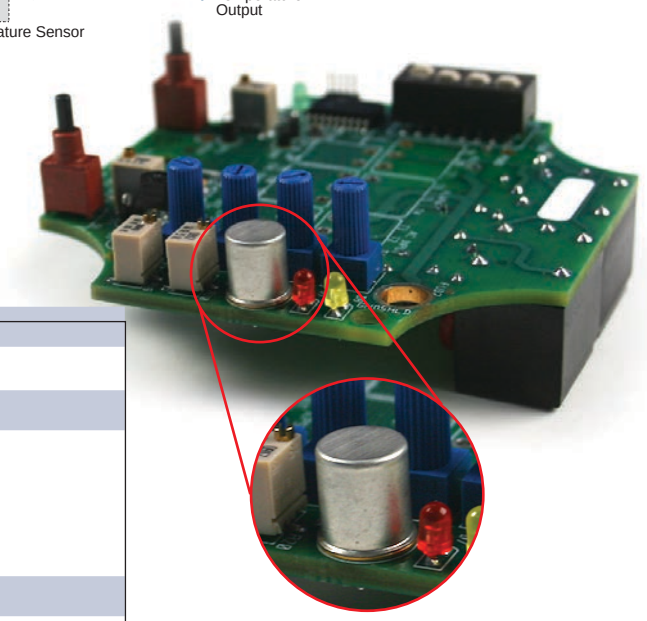

Example of a TO-5 accelerometer mounted on a circuit board

How to Order

Style					
66	Low Cost, Embeddable Accelerometer				
	Package Size and Sensitivity				
	10	Low-profile TO-5 with 10 mV/g sensitivity			
	16	Low-profile TO-5 with 1 mV/g sensitivity — must select configuration 2A below			
	19	Low-profile TO-5 with 5 pC/g sensitivity — must select configuration 2C below			
	29	TO-5 with 11 pC/g sensitivity — must select configuration 2C below			
		Sensor Configuration and Excitation Scheme			
		2A	2-wire ICP® voltage mode (pwr/sgnl, gnd), current regulated power		
		2C	2-wire charge mode (sgnl, gnd) — for size and sensitivity 19, 29 or 39 only		
		3L	3-wire voltage mode (pwr, sgnl, gnd), low power		
		4T	4-wire voltage mode with temperature output (pwr, sgnl, gnd, temp)		
			Orientation / Polarity		
			PZ	Positive output for acceleration along z-axis (in upward direction when pin mounted)	
			NZ	Negative output for acceleration along z-axis (in upward direction when pin mounted)	
				Electrical Connection	
				1	Header Pins
				2	Integral 1 ft. (0.3 m) cable
					Options
					XX — Overall integral cable length in "XX" ft. (other than standard 1 ft.)
					MXX — Overall integral cable length in "XX" meters (other than standard 0.3 m)
Example					
66	21	2A	PZ	1	Low-cost, TO-5 size, 100 mV.g, 2-wire, ICP accelerometer with positive polarity and header pin connections

Low Profile TO-5



TO-5

Series 350

High Amplitude ICP® Shock Accelerometers

Piezoelectric ICP® accelerometers afford a very high signal output (+/- 5 volts full scale) and the ease of two-wire electrical connectivity. Their inherent ruggedness enables them to be severely over ranged without damage. The addition of internal mechanical isolation minimizes the high frequency stress that would otherwise be encountered by their ceramic sensing elements. This mechanical isolation, coupled with an internal 2-pole electrical filter, built into the ICP® circuitry, tailors the overall accelerometer response to assure data quality to frequencies as high as 10 kHz. Depending on the specific model, accelerations in excess of 50 kg can be successfully measured. These modern designs, with their internal elastomeric isolation materials are verified through calibration to remain dynamically linear and are enabling piezoelectric accelerometers to operate in increasingly severe acceleration environments.

Highlights:

- Built-in Mechanical Isolation
- Built-in Electrical Filter
- Lightweight titanium construction
- Hermetically sealed for harsh environments
- Available with integral cable
- or electrical connector

Applications:

- Metal to metal impact
- Nearfield & farfield pyroshock
- Shaker Shock
- Explosive bolts & stage separation
- Pile Driver Monitoring
- Body Armor and Helmet Testing

Models
350C23, 350D02, 350B21, 350A43, 350C24

Shock Accelerometers			
Model Number	350C23	350D02	350B21
Sensitivity	0.5 mV/g	0.1 mV/g	0.05 mV/g
Measurement Range	± 10,000 g pk	50,000 g pk	± 100,000 g pk
Broadband Resolution	0.04 g rms	0.5 g rms	0.3 g rms
Frequency Range (± 1 dB)	0.4 to 10k Hz	4 to 10k Hz	1 to 10k Hz
Electrical Filter Corner	13 kHz (-3dB)	13 kHz	—
Mechanical Filter Resonance	23 kHz	23 kHz	—
Resonant Frequency	≥ 100 kHz	≥ 100 kHz	≥ 200 kHz
Temperature Range	0 to +150 °F -18 to +66 °C	0 to +150 °F -18 to +66 °C	-65 to +200 °F -54 to +93 °C
Sensing Element	Ceramic/Shear	Ceramic/Shear	Ceramic/Shear
Electrical Connector	Integral Cable	Integral Cable	Integral Cable
Electrical Ground Isolation	Yes	Yes	Yes
Housing Material	Titanium	Titanium	Titanium
Sealing	Hermetic	Hermetic	Hermetic
Weight	4.5 gm	4.2 gm	4.4 gm
Size	3/8 x 0.75 in 3/8 in x 19.1 mm	3/8 x 0.75 in 3/8 in x 19.1 mm	3/8 x 0.73 in 3/8 in x 18.5 mm
Mounting	1/4-28 Stud	1/4-28 Stud	1/4-28 Stud
Additional Accessories			
Adhesive Mounting Base	080M217, M080M217	080M217, M080M217	080M217, M080M217
Triaxial Mounting Adaptor	080A180, M080A180	080A180, M080A180	080A180, M080A180
Mating Cable Connectors	AL	AL	AL
Connector Adaptor	070A02	070A02	070A02
Additional Versions			
Metric Mounting Thread	M350B23	M350C02	M350B21

Pressure Products for Blast Testing

Measuring Explosions and Propellant Burns

Pressure sensors with quartz, ceramic and tourmaline sensing elements are used for a wide variety of shock wave, blast and explosive testing. Typical applications include measurement of shock and blast waves, combustion or detonation in closed bombs, projectile velocity, free field or underwater explosive testing, and squib lot acceptance testing. All of these applications require high frequency response and durability, ability to drive long cables, and operate in adverse environments.

In applications involving long input cables to data acquisition systems, care must be exercised to assure the measurement system has adequate frequency response. Capacitance associated with the long cables can act as a low pass filter. Sensor output voltage, cable capacitance and constant current are factors to be considered. More current is required to drive higher voltages over longer cables. PCB® signal conditioners can be easily field-adjusted up to 20 mA to drive long cables. Selecting a sensor to provide about 1 V full scale for the expected pressure to be measured, rather than 5V, will provide 5 times greater frequency response for a given current and cable length.

Most of the sensors listed in this section incorporate acceleration-compensating sensing elements with integral electronics, which provide a frequency-tailored, non-resonant response. Frequency tailored sensors have microsecond rise time and suppressed resonance to faithfully follow shock wave events without the characteristic "ringing" common in other sensors

Applications:

- Air Blast Measurement
- Underwater Explosion Measurement
- Peak and Total Impulse
- Explosive Research and Structural Loading
- Shock Tube or Closed Bomb Testing
- Wave Velocity and/or Time of Arrival Determinations
- Explosive Component (e.g., Squib) Lot Acceptance

Series 113B

High Frequency, General Purpose Pressure Sensors

PCB® Series 113B dynamic pressure sensors set the standard for extremely fast, micro-second response and a wide amplitude and frequency range that allows them to excel in high-frequency applications where minimum sensor diameter is required. Typical applications include combustion studies, explosive component testing (e.g. detonators, explosive bolts), airbag testing, and measurement of air blast shock waves resulting from explosions.

Highlights

- Fast rise time ≤ 1 µsec from quartz element
- Ultra-high resonant frequency of ≥ 500 kHz
- Frequency-tailored output without the "ringing" characteristic of most other sensors
- Internal acceleration compensation minimizes shock and vibration sensitivity

Dynamic Pressure Sensors for High Frequency

Model Number	113B28	113B27	113B21	113B26	113B24	113B22	113B23	113B03
Measurement Range (+/- 5 Volt Output)	50 psi 345 kPa	100 psi 690 kPa	200 psi 1380kPa	500 psi 3450 kPa	1 kpsi 6895 kPa	5 kpsi 34,475 kPa	10 kpsi 68,950 kPa	15 kpsi 103,420 kPa
Useful Overrange (+/- 10 Volt Output)	100 psi [1] 690 kPa [1]	200 psi [1] 1380 kPa [1]	400 psi [1] 2758 kPa [1]	1 kpsi [1] 6895 kPa [1]	2 kpsi [1] 13,790 kPa [1]	10 kpsi [1] 68,950 kPa [1]	—	—
Sensitivity	100 mV/psi 14.5 mV/kPa	50 mV/psi 7.25 mV/kPa	25 mV/psi 3.6 mV/kPa	10 mV/psi 1.45 mV/kPa	5 mV/psi 0.725 mV/kPa	1 mV/psi 0.145 mV/psi	0.5 mV/psi 0.073 mV/kPa	0.44 pC/psi 0.064 pC/kPa
Maximum Pressure	1 kpsi 6895 kPa	1 kpsi 6895 kPa	1 kpsi 6895 kPa	10 kpsi 68,950 kPa	10 kpsi 68,950 kPa	15 kpsi 103,420 kPa	15 kpsi 103,420 kPa	15 kpsi 103,420 kPa
Resolution	0.5 mpsi 0.0034 kPa	1 mpsi 0.007 kPa	1 mspi 0.007 kPa	2 mpsi 0.014 kPa	20 mpsi 0.138 kPa	20 mpsi 0.138 kPa	40 mpsi 0.28 kPa	10 mpsi [3] 0.07 kPa [3]
Resonant Frequency	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz
Rise Time (Reflected)	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec
Low Frequency Response (-5 %)	0.5 Hz	0.5 Hz	0.5 Hz	0.01 Hz	0.005 Hz	0.001 Hz	0.0005 Hz	—
Non-linearity	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]
Acceleration Sensitivity	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)
Temperature Range	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-400 to +400 °F -240 to +204 °C
Discharge Time Constant (at room temp)	≥ 1 sec	≥ 1 sec	≥ 1 sec	≥ 50 sec	≥ 100 sec	≥ 500 sec	≥ 1000 sec	—
Electrical Connector	10-32 Jack	10-32 Jack	10-32 Jack	10-32 Jack	10-32 Jack	10-32 Jack	10-32 Jack	10-32 jack
Housing Material	17-4 Stainless	17-4 Stainless	17-4 Stainless	17-4 Stainless	17-4 Stainless	17-4 Stainless	17-4 Stainless	17-4 Stainless
Diaphragm Material	Invar	Invar	Invar	Invar	Invar	Invar	Invar	Invar
Sealing	Welded Hermetic	Welded Hermetic	Welded Hermetic	Welded Hermetic	Welded Hermetic	Welded Hermetic	Welded Hermetic	Welded Hermetic

Mounting Adaptors

061A01 (3/8-24)
061A10 (M10)
062A01 (1/8-NPT)

061A59 (3/8-24 Delrin, Ground Isolated, up to 500 psi)

Series 113B Dynamic Pressure Sensors for High Frequency

Supplied Accessories

Seal Rings: (3) 065A02 brass, 0.015 in. thick, (1) 065A05 stainless steel, 0.240 in. thick.

Clamp Nuts: (1) 060A03 English 5/16-24 thread, (1) 060A05 metric M7 thread

Notes

[1] For +10 volt output, minimum 24 VDC supply voltage required. Negative 10 volt output may be limited by output bias.

[2] Zero-based, least-squares, straight line method.

[3] Resolution dependent on signal conditioning and cable length used in charge system.

Series 102B

Ground Isolated Version of the Series 113B

These sensors have all of the same features and benefits of the Series 113B, plus the added benefit of having their output electrically isolated from ground, which helps prevent ground loop problems. This series can accomodate an optional ablative coating (Prefix: CA) to protect the diaphram from thermal shock in flash-temperature applications.

Tips from Techs

Ablative Coating Option 'CA' Available for Flash Temperature Protection

Highlights

- Ultra-high frequency > 500 kHz
- Fast rise time < 1 µsec
- Peak pressure and total impulse

Applications

- Shock Tubes and Closed Bombs
- Time-of-arrival Measurements
- Explosion, Blast, and Shock Wave

Ground Isolated, Dynamic Pressure Sensors for High Frequency

Model Number	102B18	102B16	102B15	102B06	102B04	102B	102B03
Measurement Range (+/- 5 Volt Output)	50 psi 345 kPa	100 psi 690 kPa	200 psi 1380 kPa	500 psi 3450 kPa	1 kpsi 6895 kPa	5 kpsi 34,475 kPa	10 kpsi 68,950 kPa
Useful Overrange (+/- 10 Volt Output)	100 psi [1] 690 kPa [1]	200 psi [1] 1380 kPa [1]	400 psi [1] 2758 kPa [1]	1 kpsi [1] 6895 kPa [1]	2 kpsi [1] 13,790 kPa [1]	10 kpsi [1] 68,950 kPa [1]	—
Sensitivity	100 mV/psi 14.5 mV/kPa	50 mV/psi 7.25 mV/kPa	25 mV/psi 3.6 mV/kPa	10 mV/psi 1.45 mV/kPa	5 mV/psi 0.725 mV/kPa	1 mV/psi 0.145 mV/psi	0.5 mV/psi 0.073 mV/kPa
Maximum Pressure	1 kpsi 6895 kPa	1 kpsi 6895 kPa	1 kpsi 6895 kPa	10 kpsi 68,950 kPa	10 kpsi 68,950 kPa	15 kpsi 103,420 kPa	15 kpsi 103,420 kPa
Resolution	0.5 mpsi 0.0034 kPa	1 mpsi 0.007 kPa	1 mspi 0.007 kPa	2 mpsi 0.014 kPa	20 mpsi 0.138 kPa	20 mpsi 0.138 kPa	40 mpsi 0.28 kPa
Resonant Frequency	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz	≥ 500k Hz
Rise Time (Reflected)	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec	≤ 1 µsec
Low Frequency Response (-5 %)	0.5 Hz	0.5 Hz	0.5 Hz	0.01 Hz	0.005 Hz	0.001 Hz	0.0005 Hz
Non-linearity	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]
Acceleration Sensitivity	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)
Temperature Range	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C
Discharge Time Constant (at room temp)	≥ 1 sec	≥ 1 sec	≥ 1 sec	≥ 50 sec	≥ 100 sec	≥ 500 sec	≥ 1000 sec
Electrical Connector	10-32 Jack	10-32 Jack	10-32 Jack	10-32 Jack	10-32 Jack	10-32 Jack	10-32 Jack
Housing Material	17-4 Stainless	17-4 Stainless	17-4 Stainless	17-4 Stainless	17-4 Stainless	17-4 Stainless	17-4 Stainless
Diaphragm Material	Invar	Invar	Invar	Invar	Invar	Invar	Invar
Sealing	Welded Hermetic	Welded Hermetic	Welded Hermetic	Welded Hermetic	Welded Hermetic	Welded Hermetic	Welded Hermetic
Additional Versions							
Metric Mounting Thread	M102B18	M102B16	M102B15	M102B06	M102B04	M102B	M102B03

This is a sample of PCB's Pressure Sensor offerings. Refer to PCB's Test & Measurement catalog or search "Pressure" at www.pcb.com.

Series 102B
Ground Isolated, Dynamic Pressure Sensors for High Frequency

Supplied Accessories
Seal Rings: (3) 065A03 brass 0.030 in. thick.
Notes
[1] For +10 volt output, minimum 24 VDC supply voltage required. Negative 10 volt output may be limited by output bias.
[2] Zero-based, least-squares, straight line method.

Models
106B52 & 106B50

Model 106B

Series 106B

ICP® High Intensity, Acoustic Pressure Sensors

Model 106B and 106B50 are high sensitivity, acceleration-compensated, ICP® quartz pressure sensors suitable for measuring intense acoustic phenomena. In fact, the series is widely used for measuring acoustic fields in operating launch vehicles and their associated payloads. The Series 106 family range spans from acoustic pressures of less than 80 dB to several psi. Similar piezoelectric technology is employed in PCB's complete range of hermetically sealed dynamic pressure sensors. These products measure pressure fluctuations from acoustic levels to tens of thousands of psi and frequencies from nearly DC to tens of kHz. Their ability to measure only pressure fluctuations above a specified frequency imposed on large static pressure fields makes them uniquely suited for such applications as combustion instability monitoring.

High Sensitivity, ICP® Acoustic Pressure Sensors

Model Number	106B52	106B50	106B
Measurement Range (± 2 V output)	1 psi 6.89k Pa [1]	5 psi 34.45k Pa	8.3 psi 57.2k Pa
Sensitivity	5000 mV/psi 725 mV/kPa	500 mV/psi 72.5 mV/kPa	300 mV/psi 43.5 mV/psi
Maximum Dynamic Pressure Step	10 psi 68.9k Pa	100 psi 690k Pa	200 psi 1379k Pa
Maximum Static Pressure	50 psi 345k Pa	500 psi 3448k Pa	2 kpsi 13,790k Pa
Resolution	0.02 mpsi 0.00013k Pa	0.07 mpsi 0.00048k Pa	0.1 mpsi 0.00069k Pa
Resonant Frequency	≥ 40k Hz	≥ 40k Hz	≥ 60k Hz
Low Frequency Response (-5 %)	2.5 Hz	0.5 Hz	0.5 Hz
Acceleration Sensitivity	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s²)
Temperature Range	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C
Discharge Time Constant (at room temp)	≥ 0.2 sec	≥ 1 sec	≥ 1 sec
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	10-32 Coaxial Jack
Housing Material	17-4 Stainless Steel	17-4 Stainless Steel	304/304L Stainless Steel
Diaphragm Material	316L Stainless Steel	316L Stainless Steel	316L Stainless Steel
Sealing	Welded Hermetic	Welded Hermetic	Welded Hermetic
Supplied Accessories			
English Clamp Nuts	(1) 060A11, 3/4-16, Delrin	(1) 060A11, 3/4-16, Delrin	(1) 060A12, 9/16-18 thd
Metric Clamp Nuts	(1) 060A13, M20x1.25, Delrin	(1) 060A13, M20x1.25, Delrin	(1) 060A14, M14 x 1.25 thd
Seal Rings	(3) 065A36 Delrin, 0.060 in thk	(3) 065A36 Delrin, 0.060 in thk	(1) 065A37, brass, 0.025 in thk
Additional Accessories			
Pipe Thread Adaptor	062A07, 1/2 NPT	062A07, 1/2 NPT	062A06, 1/2 NPT
English Thread Adaptor	—	—	061A60, 3/4-16 thd
Ground Isolated Adaptor, English Thread	061A65, 1.0-12 thd, Delrin	061A65, 1.0-12 thd, Delrin	061A61, 3/4-16 thd, Delrin
Water Cooled Adaptor	064A07	064A07	064B06
Mating Cable Connectors	EB	EB	EB
Recommended Stock Cables	002 Low Cost, 003 CE	002 Low Cost, 003 CE	002 Low Cost, 003 CE
Notes			
[1] For ± 5 V output			

This is a sample of PCB's Quartz ICP Pressure Sensors. Refer to PCB's Test & Measurement catalog or search "106" at www.pcb.com.

Series 132

Time of Arrival, ICP® Micro-pressure Sensors

High-Sensitivity Micro-Pressure Sensors are well suited for short wavelength acoustic and shock wave measurements associated with high-frequency projectile detection systems. Incorporating a 1mm diameter sensing element and integral microelectronics in a 3mm housing, these sensors have very high sensitivity and microsecond response capable of identifying the bow and stern wave from a passing projectile. An internal 8 kHz high-pass filter eliminates low-frequency inputs. Series 132 Microsensors are available in five different physical configurations to accommodate a wide range of application requirements.

Series 132A30 Microsensors all have a sensitivity of 100 mV/psi and come in a variety of external configurations to suit your specific application.

Highlights

- Shock wave time-of-arrival ICP® microsensors
- 50 psi (344 kPa) range
- Rise time <3 µsec
- Resonant frequency >1M Hz
- 0.124" (3.15 mm) diameter diaphragm



ICP® Micro-pressure Sensors for Time of Arrival

Model Number	132A31	132A35	132A36	132A37
Measurement Range	50 psi 345 kPa	50 psi 345 kPa	50 psi 345 kPa	50 psi 345 kPa
Sensitivity	140 mV/psi 20 mV/kPa	240 mV/psi 34.8 mV/kPa	140 mV/psi 20 mV/kPa	140 mV/psi 20 mV/kPa
Maximum Dynamic Pressure Step	800 psi 5515 kPa	800 psi 5515 kPa	800 psi 5515 kPa	800 psi 5515 kPa
Resolution	1 mpsi 0.007 kPa	1 mpsi 0.007 kPa	1 mpsi 0.007 kPa	1 mpsi 0.007 kPa
Resonant Frequency	> 1000 kHz	> 1000 kHz	> 1000 kHz	> 1000 kHz
Rise Time (Incident)	< 3 µsec	< 3 µsec	< 3 µsec	< 3 µsec
Rise Time (Reflected)	< 0.5 µsec	< 0.5 µsec	< 0.5 µsec	< 0.5 µsec
Low Frequency Response (-5 %)	11 kHz	11 kHz	11 kHz	11 kHz
Temperature Range	0 to +175 °F -18 to +79 °C	0 to +175 °F -18 to +79 °C	0 to +175 °F -18 to +79 °C	0 to +175 °F -18 to +79 °C
Discharge Time Constant (at room temp)	> 0.000045 sec	> 0.000045 sec	> 0.000045 sec	> 0.000045 sec
Electrical Connector	Integral Cable	Integral Cable	10-32 Coaxial Jack	Integral Cable
Housing Material	Stainless Steel	Stainless Steel	Delrin	Stainless Steel
Sealing	Epoxy	Epoxy	Epoxy	Epoxy
Supplied Accessories				
English Clamp Nut	060A28	060A28	—	—
10-32 Plug Solder Adaptor	070B09	070B09	—	070B09
Spanner Wrench	—	—	061A30	—
O-Rings	—	—	—	160-0238-00

Tips from Techs

*Series 134 can be used for shock tube calibration in a dry gas enironment.

Series 134*

Tourmaline Pressure Bar

This unique non-resonant sensor is designed for instantaneous, reflected (face-on) shock wave pressure measurements. A shock wave pressure impacting the very thin tourmaline crystal which operates into a silver alloyed "pressure bar", eliminates sensor structure response. The sensor has a 0.2-microsecond rise time. Since the sensor diaphragm end is coated with a conductive silver epoxy, the sensor should not be used in water or chemical environments.

Highlights

- Designed for reflected shock wave pressure measurement
- Unique non-resonating design, Tourmaline sensing element
- Pressure ranges from 1000 to 20k psi (6894 to 137,900 kPa)
- Rise time ≤ 0.2 µsec

Tourmaline ICP® Pressure Bar for Instantaneous Reflected (face-one) Shock Wave Measurements

Series Number	134A
Measurement Range (+/- 5 Volt Output unless noted)	1000 psi to 20 kpsi 6895 kPa to 137900 kPa
Sensitivity	5 mv/psi to 0.25 mV/psi 0.73 mV/kPa to 0.04 mV/kPa
Resolution	20 mpsi to 300 mpsi 0.14 kPa to 2.1 kPa
Resonant Frequency	> 1500 kHz
Rise Time (Reflected)	< 0.2 µsec
Low Frequency Response (-5 %)	0.25 kHz
Non-linearity	< 2% [1]
Temperature Range	+32 to +120 °F 0 to +49 °C
Discharge Time Constant(at room temp)	> 1 sec
Electrical Connector	10-32 Coaxial Jack
Housing Material	Stainless Steel
Diaphragm Material	Epoxy
Sealing	Epoxy
Supplied Accessories	
Spanner Wrench	061A30
Additional Accessories	
Mating Cable Connectors	EB
Recommended Stock Cables	Low Noise, 003 CE
Additional Versions	
Charge Output	134A, 134A02
Notes	
[1] Zero-based, least-squares, straight line method.	

Series 137

ICP® Free-Field Blast Pressure "Pencil" Probe

Series 137 incorporates acceleration-compensated quartz elements and integral microelectronics for long cable driving, improved stability and low thermal sensitivity.

Highlights

- ICP® free-field blast pencil probes
- Ranges from 50 to 5000 psi (344 to 34,475 kPa)
- Rise time <4 µsec
- Resonant frequency >500k Hz

Free-field ICP® Blast Pressure Probe

Model 137B2XB (BNC Connector)

Model 137B2XA (10-32 Connector with Protective Cover)

Model 137B25

Model Number	137B21B	137B22B	137B23B	137B24B
Measurement Range	1 kpsi [3] 6895 kPa [3]	500 psi 3447 kPa	50 psi 345 kPa	250 psi 1724 kPa
Useful Overrange	—	1 kpsi [1] 6895 kPa [1]	100 psi [1] 690 kPa [1]	500 psi [1] 3447 kPa [1]
Sensitivity	1 mV/psi 0.145 mV/kPa	10 mV/psi 1.45 mV/kPa	100 mV/psi 14.5 mV/kPa	20 mV/psi 2.9 mV/kPa
Maximum Pressure	5 kpsi 34,475 kPa	5 kpsi 34,474 kPa	1 kpsi 6895 kPa	5 kpsi 34,474 kPa
Resolution	8.5 mpsi 0.059 kPa	1 mpsi 0.007 kPa	10 mpsi 0.069 kPa	0.7 mpsi 0.005 kPa
Resonant Frequency	> 400 kHz	> 400 kHz	> 400 kHz	> 400 kHz
Rise Time (Incident)	< 4 µsec	< 4 µsec	< 4 µsec	< 4 µsec
Non-linearity	< 1 % [2]	< 1 % [2]	< 1 % [2]	< 1 % [2]
Temperature Range	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C
Discharge Time Constant(at room temp)	> 0.2 sec	> 0.2 sec	> 0.2 sec	> 0.2 sec
Electrical Connector	BNC Coaxial Jack	BNC Coaxial Jack	BNC Coaxial Jack	BNC Coaxial Jack
Housing Material	Aluminum	Aluminum	Aluminum	Aluminum
Diaphragm Material	Invar	Invar	Invar	Invar
Sealing	Epoxy	Epoxy	Epoxy	Epoxy
Additional Accessories				
Mating Cable Connectors	—	—	AC	—
Recommended Stock Cables (29 pF/ft, 95 pF/m)	—	—	002 Multi-strand for Blast	—
Dual Output Cable	010AYXXXQM	X	X	010AYXXXQM
Additional Versions				
10-32 Coaxial Jack Connector with Protective Cover	137B21A	137B22A	137B23A	137B24A
Placebo, BNC Jack Only	137BPBO	137BPBO	137BPBO	137BPBO
Two-Sensor Pencil Probe	137B28	137B27	137B25	137B26
Active Sensor in front, Placebo in rear	—	—	—	137B32
Notes				

[1] For +10 volt output, minimum 24 VDC supply voltage required. Negative 10 volt output may be limited by output bias. [2] Zero-based, least-squares, straight line method. [3] For +/- 1V output.

Series 138

ICP® Tourmaline Underwater Blast Sensor

Series 138 Sensors measure shock wave pressures associated with underwater explosion testing. The sensors are structured with a volumetrically sensitive tourmaline crystal, suspended and sealed in an insulating, oil-filled vinyl tube. They have integral microelectronics. These underwater shock wave sensors provide a clean, non-resonant, high-voltage output through long cables in adverse underwater environments. They can be supplied with a sealed cable of appropriate length, ready to operate. Two physical configurations are available.

Highlights

- ICP® underwater blast explosion pressure probes
- Ranges from 1000 to 50k psi (6894 to 344,740 kPa)
- Rise time <1.5 µsec
- Resonant frequency >1M Hz

CE

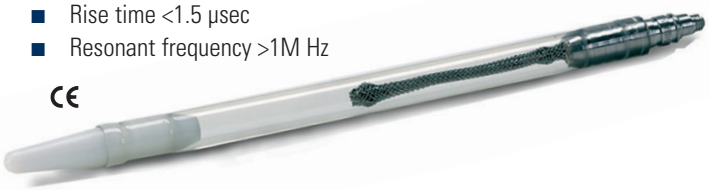

Underwater Tourmaline Blast Sensors for Peak, Overpressure and High-pressure Bubble Energy Measurements Series 138A Model Numbering System			
1) Connector Type			
Default	10-32 Coaxial Jack		
W	Attached Waterproof Cable		
	2A) ICP® Output Pressure Range and Tube Length / Configuration		
	138A01	Measurement Range: 1000 psi (6895 kPa) with 7.6 in.(193 mm) Length and Sinker Hole for Vertical Mounting	
	138A02	Measurement Range: 1000 psi (6895 kPa) with 4.7 in. (120 mm) Length for Horizontal Mounting	
	138A05	Measurement Range: 5000 psi (34,475 kPa) with 7.6 in.(193 mm) Length and Sinker Hole for Vertical Mounting	
	138A06	Measurement Range: 5000 psi (34,475 kPa) with 4.7 in. (120 mm) Length for Horizontal Mounting	
	138A10	Measurement Range: 10 kpsi (68,950 kPa) with 7.6 in.(193 mm) Length and Sinker Hole for Vertical Mounting	
	138A11	Measurement Range: 10 kpsi (68,950 kPa) with 4.7 in. (120 mm) Length for Horizontal Mounting	
	138A25	Measurement Range: 25 kpsi (172,375 kPa) with 7.6 in.(193 mm) Length and Sinker Hole for Vertical Mounting	
	138A26	Measurement Range: 25 kpsi (172,375 kPa) with 4.7 in. (120 mm) Length for Horizontal Mounting	
	138A50	Measurement Range: 50 kpsi (344,750 kPa) with 7.6 in.(193 mm) Length and Sinker Hole for Vertical Mounting	
	138A51	Measurement Range: 50 kpsi (344,750 kPa) with 4.7 in. (120 mm) Length for Horizontal Mounting	
	2B) Charge Output Pressure Range and Tube Length / Configuration		
	138A	Measurement Range: 25 kpsi (172,375 kPa) with 7.6 in.(193 mm) Length and Sinker Hole for Vertical Mounting	
	138A24	Measurement Range: 25 kpsi (172,375 kPa) with 4.7 in. (120 mm) Length for Horizontal Mounting	
		3) Attached Model 038 Cable Length (add only if ordering the W option)	
		/038CYxxxAC	Specify total length xxx in feet. Cable is terminated with BNC plug connector.
		/M038CYxxxAC	Specify total length xxx in meters. Cable is terminated with BNC plug connector.
Example			
W	138A05	/038CY300AC	Attached 300 ft. 038 cable, 5000 psi measurement range, 7.6 in. length, sinker hole, BNC plug termination.

Pressure Products for Ballistic Testing

Applications

- Ammunition and Gun Testing
- Explosives Testing
- Closed Bombs
- Recoil Mechanisms
- Ultra High-frequency Detonation

Ballistic Pressure Sensors

PCB® has supplied high frequency, durable, Quartz ballistics pressure sensors in both charge and ICP® voltage mode versions for over forty years. The Series 109 ICP® ballistic pressure sensors are acceleration compensated, and have a ceramic coated integral diaphragm to attenuate thermal shock associated with burning propellants. This series also features a floating clamp nut that reduces strain sensitivity on the sensor body due to mounting torque. The ICP® integral electronics are protected from shock such as that found in gun test applications. Series 119 charge output versions are also available.

In the early 1970's PCB® worked with members of the Sporting Arms and Ammunition Manufacturers' Institute (SAAMI) to develop an accurate, durable, standard test method for sporting arms ammunition. Pressure sensors suitable for implementation into a standardized test method for rapid-fire production testing of ammunition were required. This method involved a sensor with a machined curved diaphragm that measures pressure directly through the shell case. Based on this success, the conformal sensor became a SAAMI/ANSI "National Standard" for ammunition testing.

Series 117B conformal pressure sensors measure true gun chamber pressure directly through an unmodified shell case. Since the sensor diaphragm is machined to conform flush to the specific chamber diameter, the measurement process is not altered or changed in any way. There are no cartridges to be drilled or troublesome gas passages to be cleaned when using the conformal method. Conformal sensors have proven to be rugged, stable instruments, lasting thousands of rounds. Since the same sensor may outlast the life of many barrels, it is possible to start and finish ammunition batch qualification testing without experiencing sensor failure during the test.

Keeping with our tradition, PCB® continues to offer a complete line of sensors for conformal and case mouth ballistic measurements. All PCB® sensors are provided with NIST traceable calibration. For pre-calibration stabilization purposes, all ballistic pressure sensors are hydraulically cycled at high pressures and most are test fired in the PCB® ballistic firing range. PCB® also offers a high pressure static calibration system, Model 905C, for on-site use in ballistic labs. Side-by-side dynamic/static comparison calibration services are offered for PCB® and competitors' ballistic sensors.

Series 109C

Series 109
ICP® Ballistic S

PCB® offers a complete line of high pressure ballistic sensors with integral electronics. They operate from a PCB® constant-current signal conditioner and provide a high-voltage, low-impedance output. ICP® sensors are well suited for applications involving long cables and operation in dirty factory or field environments.

These sensors incorporate a captivated floating clamp nut and a more stable structure for improved accuracy, reliability, and lower thermal transient sensitivity. They are structured with quartz sensing elements, built-in microelectronics, and an integral machined ceramic-coated diaphragm for greater durability, overrange capability, high-frequency response, and improved linearity.

Models 109C11 and 109C12 are acceleration-compensated ICP® sensors for high-energy, high-frequency applications, such as detonation, closed bomb combustion, and explosive blast measurements under extreme shock conditions.

Series 119
Charge Mode Ballistic Sensors

Charge Mode Pressure Sensors are well suited for high-pressure ballistics, detonation, and explosive research and test applications.

These sensors incorporate stable quartz-sensing elements, a durable-machined ceramic-coated integral diaphragm and floating clamp nut.

Models 119B11 and 119B12 are unique, acceleration-compensated, high resolution ballistic sensors designed for high-pressure, high-energy ballistics, detonation, and explosive applications under high-shock conditions, such as those that might be encountered in howitzer and liquid-propellant weapons. Two dynamic ranges of 80,000 and 100,000 psi are available.

Series 119B

High Pressure Acceleration Compensated Sensors				
Model Number	**109C11**	**109C12**	**119B11**	**119B12**
Measurement Range	80 kpsi 552,000 kPa	100 kpsi 690,000 kPa	80 kpsi 552,000 kPa	100 kpsi 690,000 kPa
Useful Overrange	100 kpsi 690,000 kPa	120 kpsi 827,370 kPa	—	—
Sensitivity	0.07 mV/psi 0.01 mV/kPa	0.07 mV/psi 0.01 mV/kPa	0.25 pC/psi 0.036 pC/kPa	0.25 pC/psi 0.036 pC/kPa
Maximum Pressure	125 kpsi 862,000 kPa	125 kpsi 862,000 kPa	100 kpsi 690,000 kPa	125 kpsi 862,000 kPa
Resolution	2 psi 13.8 kPa	2 psi 13.8 kPa	1 psi 7 kPa	1 psi 7 kPa
Resonant Frequency	> 400 kHz	> 400 kHz	> 400 kHz	> 400 kHz
Rise Time (Reflected)	< 2 µsec	< 2 µsec	< 2 µsec	< 2 µsec
Non-linearity	< 2 % [1]	< 2 % [1]	< 2 % [1]	< 2 % [1]
Acceleration Sensitivity	< 0.02 psi/g < 0.015 kPa/(m/s²)	< 0.02 psi/g < 0.015 kPa/(m/s²)	< 0.02 psi/g < 0.015 kPa/(m/s²)	< 0.02 psi/g < 0.015 kPa/(m/s²)
Temperature Range	-100 to +275 °F -73 to +135 °C	-100 to +275 °F -73 to +135 °C	-300 to +400 °F -184 to +204 °C	-300 to +400 °F -184 to +204 °C
Discharge Time Constant(at room temp)	> 2000 sec	> 2000 sec	–	–
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	10-32 Coaxial Jack	10-32 Coaxial Jack
Housing Material	C-300 Vascomax	C-300 Vascomax	C-300 Vascomax	C-300 Vascomax
Diaphragm Material	C-300 Vascomax	C-300 Vascomax	C-300 Vascomax	C-300 Vascomax
Diaphragm Coating	Ceramic	Ceramic	Ceramic	Ceramic
Sealing	Epoxy	Epoxy	Epoxy	Epoxy
Supplied Accessories				
Seals	065A06	065A06	065A06	065A06
Additional Accessories				
English Installation Tool Kits	040A20	040A20	040A20	040A20
Metric Installation Tool Kits	040A21	040A21	040A21	040A21
Mating Cable Connectors	EB	EB	EB	EB
Recommended Stock Cables	002 Low Cost, 003 CE	002 Low Cost, 003 CE	003	003
Additional Versions				
Metric Mount	M	M	M	M
Integral Threads	109B11	109B12	119B01	119B02
Hermetic Sealing	—	—	H	H
Notes				
[1] Zero-based, least-squares, straight line method.				

Series 117B

Charge Mode Conformal Ballistic Sensors

Conformal ballistic sensors measure true gun chamber pressure directly through the cartridge case. The diaphragm of the conformal sensor is contoured to match a specific chamber diameter. An alignment guide and spacers help the user to install the sensor flush with the gun chamber walls.

The conformal ballistic sensor, when correctly installed, has a proven life expectancy of hundreds of thousands of rounds, outlasting many test barrels. Rapid-fire testing is possible since there are no cartridges to drill and align, no diaphragm ablatives to apply, and no gas passages to clean. The conformal sensor does not affect operation of the test barrel, nor change the measurement process.

Developed in cooperation with members of SAAMI to provide an accurate rapid-fire electronic production test method to replace the mechanical "copper crusher," the conformal sensor has experienced 20 years of proven performance.

Conformal calibration through an unfired, unmodified empty cartridge shell case with PCB® Series 090B Calibration Adaptor accounts for the effects of the cartridge case. Output from the conformal sensor is compatible with any charge amplifier. The PCB® Model 443A53 Digital Peak Holding System with a charge amplifier and auto-reset peak meter facilitates rapid-fire testing of production ammunition.

The two machined flats near the connector end, an alignment guide, and a captive retaining nut facilitate installation. The nut automatically extracts the sensor when it is unscrewed. Series 090B Calibration Adaptor permits static calibration of the Model 117B Sensor, with pressures to be applied to the empty cartridge case. Spacer set is supplied to facilitate flush installation of the sensor.

Highlights

- Proven long life
- Outlasts life of many barrels
- SAAMI "standard" test method
- Allows rapid-fire testing
- No drilled cases or recessed passages
- Cost effective

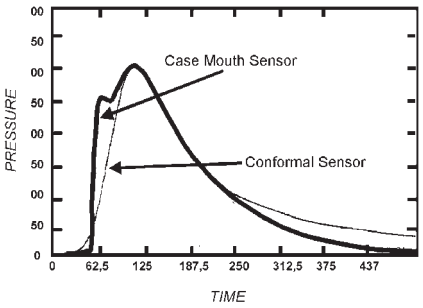

Conformal vs. Standard Case Mouth Installation



Model 117B

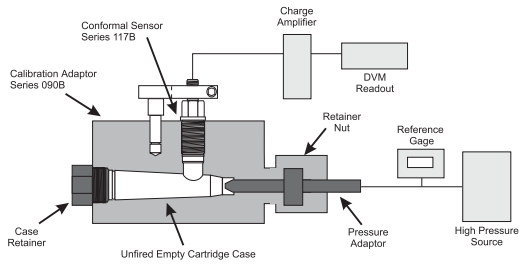

Typical Conformal Calibration Adaptor System

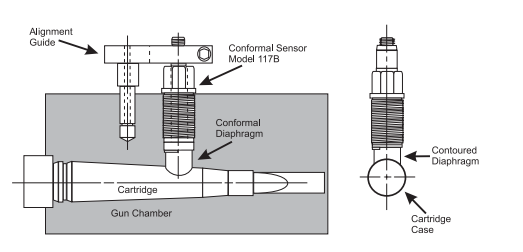

Typical Conformal Sensor Installation in Universal Receiver

Ballistic Pressure Sensors Small Arms Testing

	Conformal Gages	
	Contact factory for proper model number to match the caliber of ammunition under test	
Model Number	117B Small Caliber	117B Large Caliber
Measurement Range	35 kpsi 241 kPa	60 kpsi 414 kPa
Sensitivity	0.110 pC/psi 0.016 pC/kPa	0.140 pC/psi 0.021 pC/kPa
Maximum Pressure	40 kpsi 275 kPa	80 kpsi 552 kPa
Resolution	2 psi 14 kPa	2 psi 14 kPa
Resonant Frequency	> 300 kHz	> 300 kHz
Rise Time (Reflected)	< 2 µsec	< 2 µsec
Non-linearity	< 2 % [1]	< 2 % [1]
Acceleration Sensitivity	<0.02 psi/g <0.014 psi/(m/s²)	<0.02 psi/g <0.014 psi/(m/s²)
Temperature Range	-100 to +400 °F -73 to +204 °C	-100 to +400 °F -73 to +204 °C
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack
Housing Material	17-4SS	17-4SS
Diaphragm Material	17-4SS	17-4SS
Additional Accessories		
Conformal Calibration Adaptors	090B	090B
Brass Calibration	Contact factory for assistance, requires customer supplied brass casings and conformal adaptor	
Mating Cable Connectors	EB	EB
Recommended Stock Cables	003	003
Notes		
[1] Zero-based, least-squares, straight line method.		

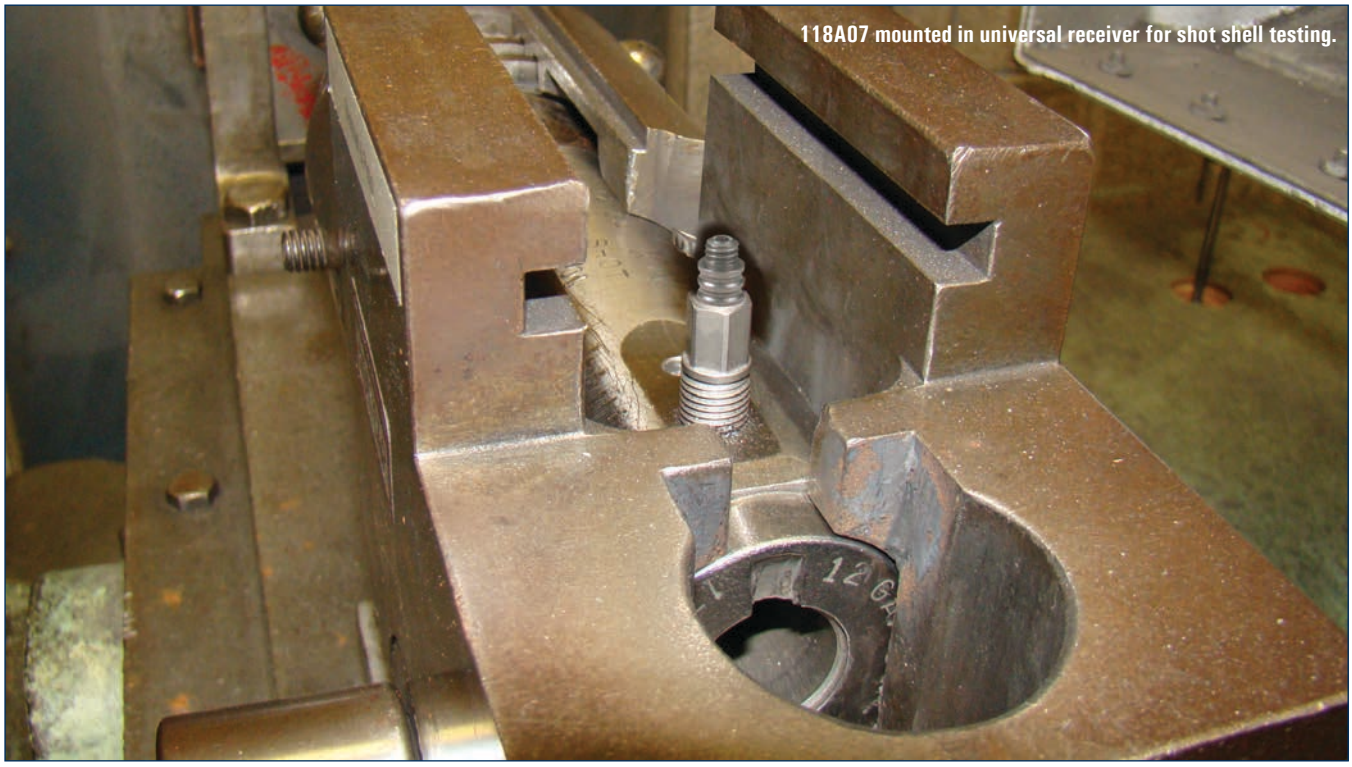

118A07 mounted in universal receiver for shot shell testing.

Ballistic Pressure Sensors Small Arms Testing

	Shot Shell Sensor
Model Number	118A07
Measurement Range	15,000 psi 103,400 kPa
Sensitivity	0.28 pC/psi 0.041 pC/kPa
Maximum Pressure	35,000 psi 241,316 kPa
Resolution	0.010 psi 0.069 kPa [1]
Resonant Frequency	> 175 kHz
Rise Time (Reflected)	< 2.5 µsec
Non-linearity	≤.5 % FS [2]
Acceleration Sensitivity	< 0.03 psi/g < 0.021 kPa/(m/s²)
Temperature Range	-50 to +325 °F -46 to +163 °C
Electrical Connector	10-32 Coaxial Jack
Housing Material	Stainless Steel
Diaphragm Material	Stainless Steel
Notes	

[1] Resolution dependent on range setting and cable length used in charge system.
[2] Zero-based, least-squares, straight line method.

Model 118A07

Charge Mode Shot Shell Sensor

For production testing of shotshell ammunition per SAAMI recommendations, this upgraded sensor measures chamber pressure through the case wall of an unmodified cartridge. The number of rounds capability has increased due to a recently modified design.

Model 118A07

Recommended Ballistic Peak Pressure Monitoring System

Model 444A53
Ballistic Peak Pressure Monitoring System
See Details on page 29.

Force & Strain Products for Structural Impact

Impact Force Sensors

Quartz, piezoelectric force and strain sensors are durable measurement devices, which possess exceptional characteristics for the measurement of dynamic force and strain events.

Applications

- Crash Testing
- Crushing
- Drop Testing
- Fatigue Testing
- Fracture Testing
- Materials Testing
- Penetration Testing
- Dynamic Tension & Compression
- Impact & Repetitive Applications
- Drop Testing
- Materials Testing

Series 208C

General Purpose Quartz Force Sensors	
Series	208C
Measurement Range (Compression)	10 - 5000 lb 44.5 -22.24 kN
Measurement Range (Tension)	10 - 500 lb 44.5 - 2.224 kN
Sensitivity	500 - 1 mV/lb 112.41 - 0.2248 mV/N
Maximum Static Force (Compression)	60 - 8000 lb 270 - 35.59 kN
Maximum Static Force (Tension)	60 - 500 lb 270 - 2.224 kN
Broadband Resolution	0.0001 - 0.05 lb-rms 0.00045 - 0.222 N-rms
Upper Frequency Limit	36 kHz
Low Frequency Response (-5%)	0.0003 - 0.01 Hz
Discharge Time Constant	≥ 50 sec - ≥ 2000 sec
Non-linearity	≤ 1%
Temperature Range	-65 to +250 °F -54 to +121 °C
Stiffness	6 lb/µin 1.05 kN/µm
Housing Material	Stainless Steel
Sealing	Hermetic
Electrical Connector	10-32 Coaxial Jack
Size (Hex x Height)	0.625 x 0.625 in 15.88 x 15.88 mm
Weight	22.7 gm
Mounting Thread	10-32 Thread
Supplied Accessories	
Impact Cap	084A03
Mounting Stud	081B05, M081A62
Thread Locker	080A81
Additional Accessories	
Mating Cable Connectors	EB
Recommended Cables	002 Low Cost, 003 CE

Series 201B

ICP® Quartz Force Ring for Performance Applications	
Series	201B
Sensitivity	50 to 1 mV/lb 11,240 to 224.8 mV/kN
Measurement Range (Compression)	100 to 5000 lb 0.4448 to 22.24 kN
Maximum Static Force (Compression)	600 to 8000 lb 2.67 to 35.59 kN
Broadband Resolution	0.002 to 0.10 lb-rms 0.00089 - 0.4448 N-rms
Low Frequency Response (-5 %)	0.006 to 0.0003 Hz
Temperature Range	-65 to +250 °F -54 to +121 °C
Preload	100 to 1000 lb 0.445 to 4.448 kN
Electrical Connector	10-32 Coaxial Jack
Sealing	Hermetic
Housing Material	Stainless Steel
Weight	10 gm
Size [1]	0.65 x 0.31 x 0.25 x 0.50 in 16.5 x 7.9 x 6.0 x 12.7 mm
Size (OD) (Sensor)	0.650 in 16.51 mm
Mounting	10-32 Thread
Supplied Accessories	
Assembly Lubricant	080A82
Mounting Stud	081A11
Anti-Friction Washer	082B01
Pilot Bushing	083B01
Notes	
[1] Diameter x Height x Bolt Diameter x Sensing Surface	

Model 740B02
Dynamic ICP® Strain Sensors

Highlights

- Measures small strain on top of large static loads
- Provides high resolution and wide dynamic range
- Designed with low profile and integral cable
- Contains built-in microelectronic circuitry
- Detects wave propagation for material velocity characterization

Structured with a quartz sensing element and microelectronic circuitry in a low-profile titanium housing, this sensor is ideal for high-resolution measurements of dynamic strain. This unit is compatible with PCB's ICP® Sensor signal conditioners and is capable of driving long cables. Typical applications include: active vibration control, noise-path analysis, modal testing, and use on aircraft and marine hulls, composite materials, and "smart" structures.

This product is CE-marking compliant to European Union EMC Directive, based upon conformance testing to the following European norms:

• EN 50081-1: 1992 Emissions

• EN 50082-1: 1992 Immunity

TYPICAL APPLICATION: An epoxy-bonded Model 740B02 Strain Sensor provides a control signal for an actively damped flexible robot manipulator, illustrated above. The electronic controller, with vibration feedback from the strain sensor, provides a signal to the amplifier, such that vibration amplitude is minimized. The active control system permits rapid settling time for a step rotation of the manipulator arm.

Series 740 Dynamic ICP® Piezoelectric Strain Sensor		
Dynamic Performance	**740B02**	**740M04**
Sensitivity[1]	50 mV/με	5 mV/με
Amplitude Range[1]	±100 μεpk	±900 μεpk
Environmental		
Temperature Range	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C
Overload Limit (Shock)	±10,000 gpk	±10,000 gpk
Acceleration Sensitivity	0.0001 με/g	0.001 με/g
Electrical		
Frequency Range	0.5 Hz to 100k Hz	0.5 Hz to 100k Hz
Excitation Voltage	20 to 30 VDC	20 to 30 VDC
Constant Current Excitation	2 to 20 mA	2 to 20 mA
Output Bias	8 to 14 VDC	8 to 14 VDC
Mechanical		
Weight	0.5 gm	0.5 gm
Size (W x L x H)	0.2 x 0.6 x 0.07 in 5.1 x 15.2 x 1.8 mm	0.2 x 0.6 x 0.07 in 5.1 x 15.2 x 1.8 mm
Mounting	Adhesive	Adhesive
Cable	Integral/Coaxial, 10 ft (3 m) Terminates in 10-32 threaded plug	Integral/Coaxial, 10 ft (3 m) Terminates in 10-32 threaded plug
Housing	Titanium	Titanium
Sensing Element	Quartz	Quartz

[1] Actual value depends upon thickness and stiffness of sensor structure interface.

CE

Model 740B02
Model 740M04

Placebo Transducers

A Tool for Data Validation

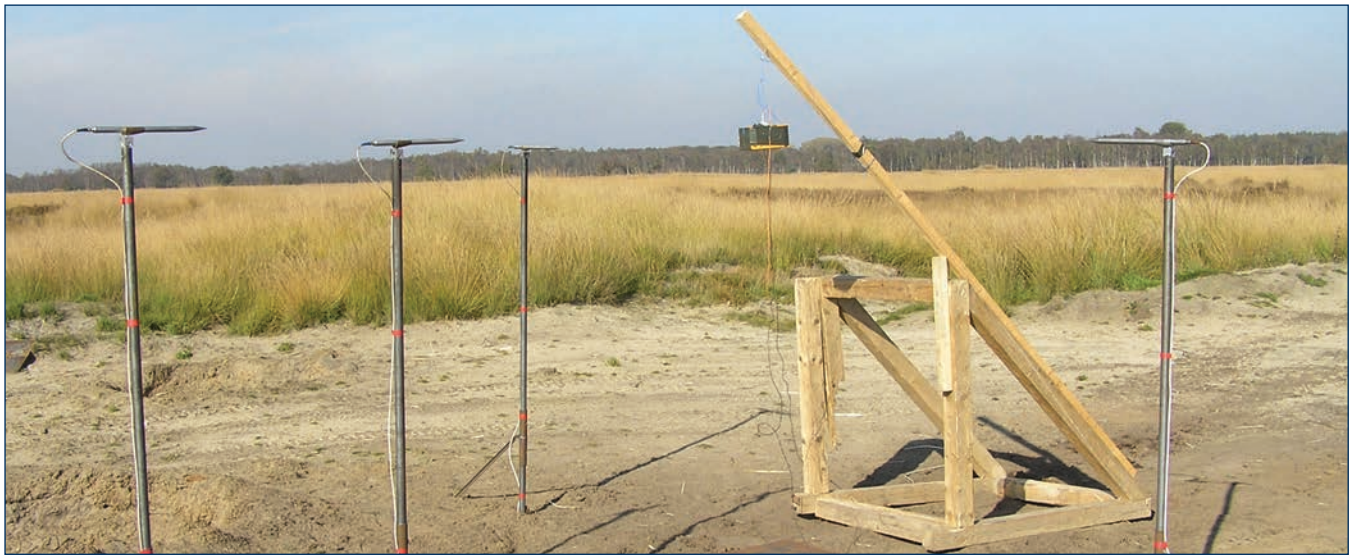

Placebo Transducers

For any testing in which the environmental operating conditions of a transducer vary with time and/or location, several requirements must be fulfilled before measurement uncertainty analysis is justified. Included among the requirements are good measurement system design practices, such as adequate low- and high-frequency response and data-sampling rates, appropriate anti-aliasing filter selection, proper grounding and shielding, and much more.

In addition to these requirements, data validation must be performed to establish that each transducer responds only to the environmental stimulus for which it is intended. For piezoelectric and piezoresistive transducers, "placebo" (IEST-RP-DTE011.1) transducers enable data validation to be accomplished. The referenced IEST standard defines a placebo transducer as 'identical to a "live" unit in every parameter except for mechanical sensitivities.' The placebo transducer should respond only to extraneous "environmental factors." Ideally, its output would be zero. Any signal output from it would indicate that signals from the "live" transducers could be corrupted.

Every transducer responds to its environment in every way it can. For example, accelerometer specifications include their response to thermal, acoustic, strain, and radiation stimuli, to name a few. While accelerometers must have their response to acoustic pressure specified, pressure transducers must have their response to acceleration specified. Thus, one transducer's desired response becomes another's undesired response.

These undesired responses can cause a change in transducer sensitivity or can result in additive, spurious signals at the transducer's output attributable to thermoelectric, electromagnetic, triboelectric and other self-generating noise phenomena. Since the test or instrumentation engineer has the best understanding of the test environment, he/she becomes responsible for data validation. The transducer manufacturer can assist by supplying "placebo" transducers to support this validation process.

Model 137BPB0

Model 102BPB0

Model 113B22PB0

Model 356A32PB0

Model 350B21PB0

Model 354C03PB0

Model 356A33PB0

Model 3991A11PB0

Other models available upon special request. Contact your local Sale Representative for more information.

Calibration Products

Pressure Calibration Systems

In addition to the products listed below, PCB® is also able to perform a number of special calibration and testing services, upon request. These include acceleration sensitivity; Ballistics firing range; cold gas shock tube; discharge time constant; temperature effects from –320 to +1,000 °F (-196 to +535 °C); hydrostatic and hermeticity; mechanical shock; and PIND (Particle Impact Noise Detection).

Dynamic Pressure Sensor Calibration Systems

Low Pressure Calibration System Model K9903C

- Maximum pressure: 1 MPa (150 psi)
- Pneumatic calibration media
- 'Step' pressure input
- 5 ms rise time
- Automated pressure controller
- Watch the video: modalshop.com/9903video

Medium Pressure Calibration System Model K9907C

- Maximum pressure: 6.9 MPa (1 000 psi)
- Compressed air or industrial helium media
- 'Step' pressure input
- Fastest rise times using poppet valve mechanism
- Watch the video: modalshop.com/9907video

High Pressure Calibration System Model K9913C

- Maximum pressure: 103 MPa (15 000 psi)
- Silicon oil media
- 'Impulse' pressure input
- 3 ms rise time with 7 ms pulse duration using drop mass
- Watch the video: modalshop.com/9913video

Special Purpose Calibrators

Ultra High Pressure Calibration System Model K9905D

- Maximum pressure: 550 MPa (80 000 psi)
- Hydraulic calibration media
- 'Step' pressure input
- Quasi-static method available for ballistics sensors and brass calibration
- SAAMI standard brass calibration

Instrumented Shock Tube Model K9901C

- Enables high frequency resonant frequency measurement
- High speed time of arrival measurements
- Operates with compressed air or inert gas
- Max burst pressure 9.6 MPa (1 400 psi)

Model K9525C

Accelerometer Calibration Workstation

The Accelerometer Calibration Workstation Model 9155D is a turnkey solution that provides all the necessary components out of the box. Principal components include a Windows® PC Controller, software, printer and 24-bit data acquisition card. System options allow custom configuration of the modular system with a variety of shakers and shock towers, accelerometer signal conditioning, test software modules and mounting accessories.

The system often includes the 9155D-830 or 9155D-831 air bearing shaker. With our air bearing shakers, customers benefit from two things: PCB's R&D investment in precision metrology and years of experience on PCB's accelerometer production line. The real world experience these shakers have in our factory results in a mature design that has been 'hardened' for durability and optimized for usability.

Model K9525C

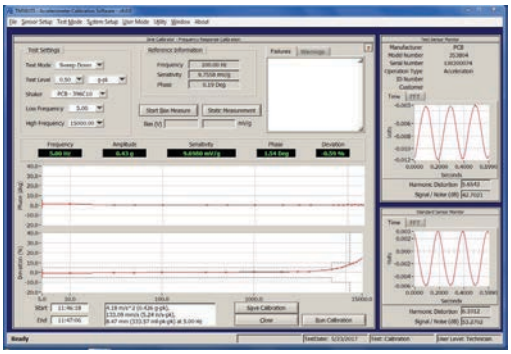

Highlights:

- Wide frequency range of 0.1 Hz to 20 kHz
- Resonant frequency testing up to 50 kHz
- Drastically reduces uncertainty by virtually eliminating transverse motion
- Integral quartz ICP® reference for long-term stability
- Lorentz force coil enables rapid centering of sensors with varying mass
- Watch the video: modalshop.com/9155video

Model K9525C

Model K9525C

Accelerometer Calibration Workstation

The PneuShock™ Model K9525C is a turnkey calibration solution for shock accelerometers. Shocks pulses are created at accelerations from 20 g to 10 000 g using a pneumatically operated projectile to strike an anvil and excite the sensor. By controlling both the level and the duration of the air pressure applied, the user gains greater control and consistency of the impacts. PneuShock provides verification and linearity check. We also offer Model 9155D-525 as an optional module for the 9155D Accelerometer Calibration Workstation.

Highlights:

- Amplitude linearity calibration of shock and crash sensors from 20 g to 10 000 g, per ISO 16062-22
- Controlled and consistent impacts using state-of-the-art pneumatically actuated exciter
- Easy refinement of impulse shape and frequency content using a wide variety of impact anvils
- Superior impact control through drive pressure and duration control

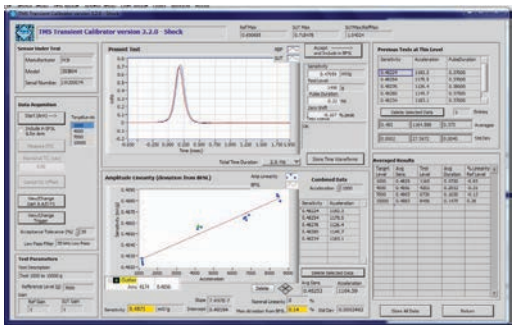

Specialized Instrumentation

LARSON DAVIS
A PCB PIEZOTRONICS DIV.

A PCB Piezotronics, Inc. division, Larson Davis provides complete solutions for noise and vibration measurement and analysis.

Model 831 Type 1 Sound Level Meter

Firearms Detection Systems

Model LxT1-QPR handheld sound level meter features a small, lightweight ergonomic design, available real-time 1/1 and 1/3 octave frequency analysis, and comes standard with a 100dB dynamic range and a 377C10 microphone for measuring 178 dB typical. When configured with PCB Models 377C01 or 377A12 ¼" Microphones, the system can safely measure high level acoustic signatures typically associated with gun-fire.

1/4" Microphone	dB Limit
377C01	168dB
377A12	182dB

Model LxT1-QPR can be upgraded to allow easy comparison of multiple shots, high-speed data logging and a large LCD display which is easily readable in all lighting conditions. In addition, the unit can be powered for 16 hours on 4xAA batteries for ease of use in the field. Finally, Model LxT1-QPR has 2GB of on-board memory and a USB connection to PC for data downloading and reporting.

A full line of accessories is available including software, sound level calibrators, outdoor microphone systems, weatherproof enclosures for short and long-term monitoring and a variety of tripods and mounting hardware. For complete specifications on Model LxT1-QPR, please visit Larson Davis at http://www.larsondavis.com/Products/soundlevelmeters/modellxt1qpr.

Model 444A53

Ballistic Peak Pressure Monitoring System

The Model 444A53 is a modular-style signal conditioner that combines a dual-mode amplifier module (443B102), a peak voltage monitoring module (444A152), and an AC power supply module (441A101) into one, integrated device. The unit connects directly with an ICP® or charge output pressure sensor, normalizes sensor sensitivity, and displays peak transient measurement signals in voltage or pressure units.

Unlike a digitizing peak detector, which is limited in accuracy by the sampling rate, the 444A152 peak monitoring module captures the true peak voltage of the transient event. Additionally, the module incorporates a 20 kHz low pass filter, offers reset capability between events, and delivers an analog output signal to profile the entire pressure event.

This device is ideal for barrel chamber pressure testing, lot testing of ammunition, and cartridge load studies. Two alternative versions (Models 444A51 and 444A52) eliminate the dual mode amplifier module and are intended for direct connection to ICP® pressure sensors, any direct voltage input, or for existing systems that already utilize a separate charge amplifier.

As with all PCB® instrumentation, this equipment is complemented with toll-free applications assistance, 24-hour customer service, and is backed by a no-risk policy that guarantees satisfaction or your money refunded.

CE

Model 444A53
Ballistic Peak Pressure Monitoring System
Captures and Compares Peak Output from Piezoelectric Ballistic Pressure Sensors

Specifications	
Model	444A53
Performance	
Channels	1
Input Sensor Type (selectable)	ICP®, charge, voltage
Input Sensitivity Adjustment (normalization)	0.001 to 9999 (pC or mV per unit)
Excitation Supplied (ICP® mode)	24 VDC @ 0 to 20 mA
Voltage Gain (ICP® or voltage mode)	0.1 to 1000
Charge Converter (charge mode)	0.1 to 10,000 mV/pC
Charge Input Limit	100,000 pC
Drift (long DTC mode)	<0.03 pC/sec
Discharge Time Constant (selectable)	0.18, 1.8, 10, 100, 1000, >100,000 sec
Peak / DVM Display	4-digit LCD
Peak Voltage Display Range (infinite hold)	± 10 V
Accuracy	± 1%
Display Mode	Peak, DVM, Bias Test (for ICP® sensors)
Rise Time	<1 µsec
Low Pass Filter	20 kHz
Peak Reset	Manual, Remote, or Auto (1 to 99 sec)
Environmental	
Temperature Range	+32 to +120 °F 0 to +50 °C
Electrical	
Power Required	100 to 240 VAC, 50 to 60 Hz
Relays (2 Form C each with HI or LOW setpoint)	1 A @ 30 VDC, 1/2 A @ 125 VAC
Physical	
Size (h x w x d)	6.2 x 6.06 x 10.2 in 157.5 x 153.9 x 259.1 mm
Electrical Connectors (input, peak/DVM output, analog output, remote reset)	BNC Jack

Signal Conditioning & Converters

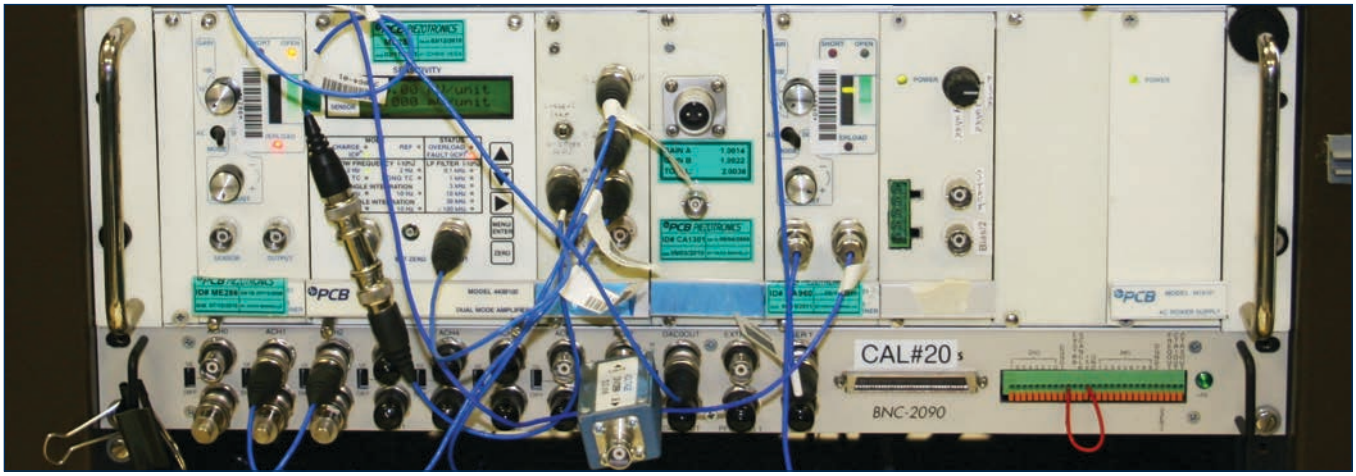

PCB® Signal Conditioning

Series 440 Modular Signal Conditioners

442B116	16-channel basic ICP® signal conditioner

Eight-channel Signal Conditioners

The 483C series of signal condtioners are eight-channel rack mount units that are capable of powering a wide variety of sensor types. The series inlcudes basic stand-alone units as well as units with higher level functionality. Input fault and overload LED indicators are included on the front panel of all models. Other features inlcude gain, filtering, ground isolation, TEDS support and computer control with supplied software.

Four-channel Multi-purpose Signal Conditioners

These four-channel benchtop signal conditioners are feature packed and cost effective. They offer low noise operation, simplicity of use, and compatibility with a wide range of sensor types. The 482C Series offers ICP® sensor excitation, incremental gain of x0.1 to x200, and computer control. Advanced units add built-in charge converters for connection to charge output sensors, lowpass filters, TEDS and an Ethernet port.

482C05	4-channel, line powered, ICP® sensor signal conditioner, unity gain, BNC input/output connections
482C16	4-channel, line powered, ICP® /voltage sensor signal conditioner, incremental gain x0.1 to x200, RS-232
482C64	4-channel, line powered, ICP®/voltage/charge sensor signal conditioner, incremental gain x0.1 to x200, RS-232, TEDS, Ethernet

Battery & Line Powered ICP® Signal Conditioners

480C02	Single-channel, battery powered, unity gain
480E09	Single-channel, battery powered, gain x1, x10, x100
480B21	3-Channel, battery powered, gain x1, x10, x100
482A21	Single-Channel, AC/DC powerable, unity gain
482B11	Single-channel AC power, gain x1, x10, x100

DC Accelerometer Signal Conditioners

483C28	8-channel signal condtioner for powering differential voltage MEMS, single-ended MEMS and bridge sensors; Incremental gain; Ethernet port for computer control
	Power Required: (direct input to unit) 100 to 240 VAC / 47 to 63 Hz

482C27	4-channel signal condtioner for powering differential voltage MEMS, single-ended MEMS and bridge sensors; Incremental gain; Front panel keypad/display; Computer controllable

Series 422

In-Line, ICP®-Powered Charge Converters				
Model Number	422E52	422E51	422E35 [1]	422E36 [1]
Gain (Charge Conversion Sensitivity)	10 mV/pC ±2.5%	100 mV/pC ±5.0%	1 mV/pC ±2%	10 mV/pC ±2%
Input Range	±500 pC	±50 pC	±2500 pC	±250 pC
Output Voltage Range	±5.0 V	±5.0 V	±2.5 V	±2.5 V
Frequency Response (+/-5%) [2]	5 to 100k Hz	5 to 100k Hz	5 to 100k Hz	5 to 100k Hz
Broadband Electrical Noise	33 µV rms	49 µV rms	14 µV rms	26 µV rms
Temperature Range	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C
Excitation Voltage	18 to 28 VDC	18 to 28 VDC	18 to 28 VDC	18 to 28 VDC
Constant Current Excitation	2 to 20 mA	2 to 20 mA	2.2 to 20 mA	2.2 to 20 mA
Input Connector	10-32 Jack	10-32 Jack	10-32 Jack	10-32 Jack
Output Connector	BNC Jack	BNC Jack	BNC Jack	BNC Jack
Size (Length x Diameter)	3.4 x 0.52 in 86 x 13 mm	3.4 x 0.52 in 86 x 13 mm	3.4 x 0.52 in 86 x 13 mm	3.4 x 0.52 in 86 x 13 mm
Weight	1.15 oz 32.7 gm	1.15 oz 32.7 gm	1.1 oz 31 gm	1.1 oz 31 gm
Additional Versions				
TEDS Addressable, On-board EEPROM	TLD422E52	TLD422E51	TLD422E35	TLD422E36
Notes				
[1] Specifically designed for use with sensors operating in elevated temperatures >+400°F (+204°C) [2] High frequency response may be limited by supply current and output cable length				

Series 402

Impedance Converters and In-Line Voltage Follower Amplifiers

Series 402A In-line voltage follower amplifiers, similar to the Series 422E charge converters, serve to convert charge output sensor signals to low-impedance voltage signals. They are recommended for applications requiring high frequency response up to 1 MHz, and for applications where sensor output (pC/unit) exceeds the maximum input range (pC) allowed in the Series 422E.

The voltage sensitivity, V, of a system including a charge output sensor, low-noise cable and voltage follower amplifier can be determined mathematically by the equation V=Q/C where Q is the charge sensitivity of the sensor in Coulombs and C is the total system capacitance in Farads. The total system capacitance is the result of the sum of the capacitance of the sensor, the capacitance of the interconnect cable, and the input capacitance of the voltage amplifier. Choose a voltage follower amplifier with an input capacitance that provides the sensitivity desired, while keeping the total output voltage (range x sensitivity) within the ±10 volt limit. Voltage follower amplifiers do not invert the polarity of the measurement signal.

Non-Inverting Voltage Follower Amplifiers and Impedance Converters for Use with Charge Output Sensors			
Voltage Follower Models	402A	402A02	402A03
Voltage gain (± 2%)	0.98	0.98	0.98
Output Range	± 10 V	± 10 V	± 10 V
Input Capacitance	< 8.0 pF	100 ± 10% pF	1000 ± 10% pF
Discharge Time Constant	1.0 second	10 second	100 second
Frequency Response (± 5%) [1]	0.5 to 1M Hz	0.05 to 1M Hz	0.005 to 1M Hz
Broadband Noise	43 µV rms	43 µV rms	43 µV rms
Output Bias	8 to 13 V	8 to 13 V	8 to 13 V
Temperature Range	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C
Power Required	18 to 28 VDC	18 to 28 VDC	18 to 28 VDC
Constant Current Required	2 to 20 mA	2 to 20 mA	2 to 20 mA
Input Connector	10-32 jack	10-32 jack	10-32 jack
Output Connector	10-32 jack	10-32 jack	10-32 jack
Size (Length x Diameter)	1.17 x 0.25 in 30 x 6 mm	1.17 x 0.25 in 30 x 6 mm	1.17 x 0.25 in 30 x 6 mm

Series 402

Note: [1] High frequency achieved at 20 mA excitation

Cables & Adaptors

Highlights

- Stock Cable Assemblies
- Custom Cable Assemblies
- Multi-conductor Cables
- Patch Panels
- Connector Adaptors

Coaxial Cable Assemblies

Coaxial Cable Assemblies

Base Model	1 ft (0.3 m)	3 ft (0.9 m)	5 ft (1.5 m)	10 ft (3.0 m)	20 ft (6.1 m)	30 ft (9.1 m)	50 ft (15.2 m)	Construct cable assembly model by combining base model with desired length, e.g., 002C10.	
030A		03	05	10	20	30	50	PTFE, Low Noise, Miniature	3-56 Plug to 10-32 Plug
030C			05	10	20	30	50	PTFE, Low Noise, Miniature	3-56 Plug to BNC Plug
018G		03	05	10	20	30		PVC, Miniature	5-44 Plug to 10-32 Plug
003G		03	05	10	20	30		TFE, Low Noise	5-44 Plug to 10-32 Plug
002P		03	05	10	20	30		FEP	5-44 Plug to BNC Plug
003P		03	05	10	20	30		TFE, Low Noise	5-44 Plug to BNC Plug
018C		03	05	10	20	30		PVC, Miniature	5-44 Plug to BNC Plug
030B			05	10	20			PTFE, Low Noise, Miniature	M3 Plug to 10-32 Plug
003R			05	10	20			TFE, Low Noise	M3 Plug to 10-32 Plug
002A		03	05	10	20	30	50	FEP	10-32 Plug to 10-32 Plug
003A	01	03	05	10	20	30	50	TFE, Low Noise	10-32 Plug to 10-32 Plug
023A				10				Hardline	10-32 Plug to 10-32 Jack
002C		03	05	10	20	30	50	FEP	10-32 Plug to BNC Plug
003C		03	05	10	20	30	50	TFE, Low Noise	10-32 Plug to BNC Plug
002B	01	03						FEP	10-32 Plug to BNC Jack
003B	01	03						TFE, Low Noise	10-32 Plug to BNC Jack
003U				10				TFE, Low Noise	SMB Female Plug to SMB Female Plug
003V				10				TFE, Low Noise	SMB Female Plug to BNC Plug
002T		03	05	10	20	30		FEP	BNC Plug to BNC Plug
003D		03		10	20			TFE, Low Noise	BNC Plug to BNC Plug
012A		03	05	10	20	30	50	PVC, RG58/U	BNC Plug to BNC Plug
012E				10	20		50	PVC, RG58/U	2-Socket Env. Sealed to BNC Plug
012R				10	20		50	PVC, RG58/U	2-Socket MIL to BNC Plug

3-56 Plug

5-44 Plug

10-32 Plug

10-32 Jack

BNC Plug

BNC Jack

M3 Plug

SMB Plug

2-Socket Plug

2-Socket
Env. Sealed Plug

Series 018C

Model 023A10

Series 002C

Series 003A

Series 012A

Coaxial Cable Specifications

Model	002	003	012	018	030
Cable Style	General Purpose	Low Noise	General Purpose	General Purpose	Low Noise
Temperature Range	-130 to +400 °F -90 to +204 °C	-320 to +500 °F -196 to +260 °C	-40 to +176 °F -40 to +80 °C	-22 to +221 °F -30 to +105 °C	-130 to +500 °F -90 to +260 °C
Impedance	50 Ohm	50 Ohm	52 Ohm	32 Ohm	50 Ohm
Capacitance	29 pF/ft 95 pF/m	30 pF/ft 98 pF/m	29 pF/ft 95 pF/m	55 pF/ft 180 pF/m	30 pF/ft 98 pF/m
Cable Jacket Material	FEP	TFE	PVC	PVC	PTFE
Cable Jacket Diameter	0.075 in 1.9 mm	0.079 in 2.01 mm	0.193 in 4.9 mm	0.054 in 1.37 mm	0.042 in 1.09 mm

Other Coaxial Cable Specifications

Model	005	006	023	038	098
Cable Style	Ruggedized	Low Noise Ruggedized	Hardline	Low Noise	Low Noise Flexible
Temperature Range	-67 to +275 °F -55 to +135 °C	-67 to +275 °F -55 to +135 °C	-300 to +1200 °F -184 to +650 °C	-58 to +250 °F -50 to +121 °C	-130 to +500 °F -90 to +260 °C
Impedance	50 Ohm	50 Ohm	—	50 Ohm	50 Ohm
Capacitance	29 pF/ft 95 pF/m	30 pF/ft 98 pF/m	100 pF/ft 328 pF/m	30 pF/ft 100 pF/m	35 pF/ft 115 pF/m
Cable Jacket Material	Polyolefin over Steel Braid	Polyolefin over Steel Braid	Stainless Steel	Polyurethane	TFE
Cable Jacket Diameter	0.200 in 5.08 mm	0.200 in 5.08 mm	0.059 in 1.5 mm	0.119 in 3.02 mm	0.079 in 2.01 mm

4-Conductor Cable Assemblies

4-Conductor Cable Assemblies

Base Model	5 ft (1.5 m)	10 ft (3.0 m)	15 ft (4.6 m)	20 ft (6.1 m)	25 ft (7.6 m)	30 ft (9.1 m)	50 ft (15.2 m)	Construct cable assembly model by combining base model with desired length, e.g., 034G20.	
034H	05	10		20		30	50	FEP, Lightweight	Mini 4-Socket Plug to (3) 10-32 Plugs
034K	05	10		20		30	50	FEP, Lightweight	Mini 4-Socket Plug to (3) BNC Plugs
019B	05	10	15	20		30		Silicone, Flexible, Lightweight	Mini 4-Socket Plug to (3) BNC Plugs
010P	05	10		20		30	50	FEP, General Purpose	4-Socket Plug to Pigtails
034A	05	10		20		30	50	FEP, Lightweight	4-Socket Plug to Pigtails
010D	05	10	15	20	25	30		FEP, General Purpose	4-Socket Plug to 4-Socket Plug
034D	05	10		20		30	50	FEP, Lightweight	4-Socket Plug to 4-Socket Plug
078D	05	10		20		30	50	Polyurethane, Flexible	4-Socket Plug to 4-Socket Plug
010F	05	10	15	20	25	30	50	FEP, General Purpose	4-Socket Plug to (3) 10-32 Plugs
034F	05	10		20		30	50	FEP, Lightweight	4-Socket Plug to (3) 10-32 Plugs
078F		10	15		25			Polyurethane, Flexible	4-Socket Plug to (3) 10-32 Plugs
010G	05	10	15	20	25	30	50	FEP, General Purpose	4-Socket Plug to (3) BNC Plugs
034G	05	10	15	20	25	30	50	FEP, Lightweight	4-Socket Plug to (3) BNC Plugs
036G	05	10	15	20	25	30		Silicone, Flexible	4-Socket Plug to (3) BNC Plugs
078G	05	10	15	20	25	30	50	Polyurethane, Flexible	4-Socket Plug to (3) BNC Plugs

Mini 4-Socket Plug

4-Socket Plug

BNC Plug

10-32 Plug

Series 034D

Series 010F

Series 034K

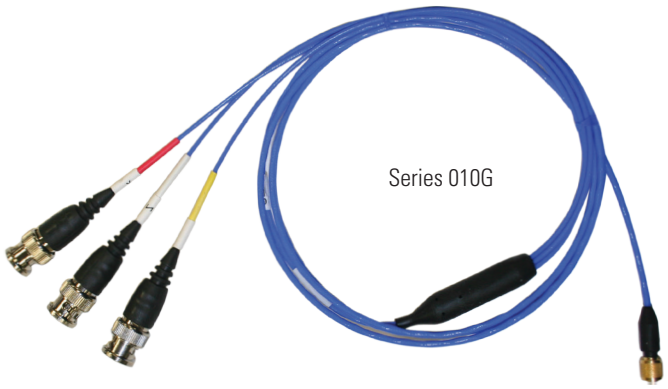
Series 010G

4-Conductor Cable Specifications

Model	010	034	019	036	078
Cable Style	General Purpose	Low Noise	Flexible Lightweight	Flexible	Flexible
Temperature Range	-130 to +392 °F -90 to +200 °C	-130 to +392 °F -90 to +200 °C	-76 to +500 °F -60 to +260 °C	-76 to +392 °F -60 to +200 °C	-58 to +185 °F -50 to +85 °C
Capacitance	16 pF/ft 52.4 pF/m	14 pF/ft 46 pF/m	15 pF/ft 49.2 pF/m	15 pF/ft 48 pF/m	25 pF/ft 81 pF/m
Cable Jacket Material	FEP	FEP	Silicone	Silicone	Polyurethane
Cable Jacket (Diameter)	0.1 in 2.54 mm	0.077 in 1.96 mm	0.070 in 1.77 mm	0.104 in 2.64 mm	0.119 in 3.02 mm

Custom Cable Assemblies

How to Configure Custom Cable Models:

1. Choose the cable length format desired, either English (ft) or Metric (m) unit lengths.
2. Choose the desired raw cable type.
3. Choose desired sensor connector type.
4. Determine the cable length required in English (ft) or Metric (m) unit lengths.
5. Choose desired termination connector type.

Example:
Model 003AK025AC defines a 25 ft, low-noise cable with right angle 10-32 plug sensor connector, BNC plug termination connector.

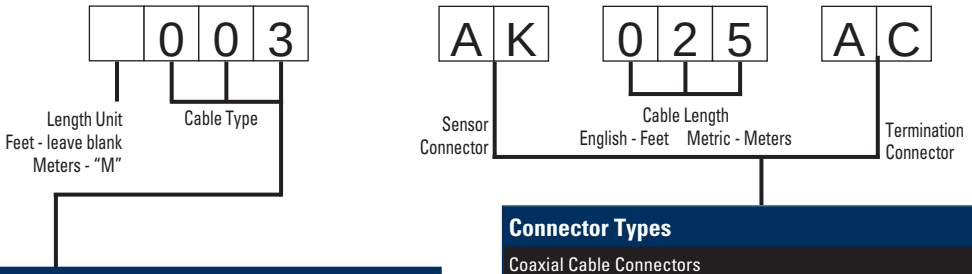

Raw Cable Type

Coaxial Cables			Diameter		Max. Temp.	
002	General Purpose, White FEP Jacket	CE	0.075 in	1.9 mm	400°F	204°C
003	Low Noise, Blue TFE Jacket	CE	0.079 in	2.0 mm	500°F	260°C
005	Ruggedized 002 Type, General Purpose	CE	0.2 in	5.08 mm	275°F	135°C
006	Ruggedized 003 Type, Low Noise	CE	0.2 in	5.08 mm	275°F	135°C
012	RG-58/U, Black Vinyl Jacket	CE	0.193 in	4.90 mm	176°F	80°C
018	Lightweight, Black PVC Jacket		0.054 in	1.37 mm	221°F	105°C
030	Low Noise, Mini, PTFE Jacket	CE	0.043 in	1.1 mm	500°F	260°C
038	Low Noise, Blue Polyurethane Jacket	CE	0.119 in	3.02 mm	250°F	121°C
098	Flexible, Low Noise, Green TFE Jacket	CE	0.079 in	2.06 mm	500°F	260°C
Twisted/Shielded Pair Cable						
024	General Purpose, Black Polyurethane Jacket	CE	0.250 in	6.35 mm	250°F	121°C
032	Lightweight, FEP Jacket		0.085 in	2.16 mm	392°F	200°C
045	High Temperature, Red PFA Jacket	CE	0.204 in	5.18 mm	250°F	121°C
053	High Temperature, Red FEP Jacket	CE	0.157 in	3.99 mm	392°F	200°C
Shielded 4-Conductor Cable						
010	General Purpose, FEP Jacket	CE	0.1 in	2.54 mm	392°F	200°C
034	Lightweight, FEP Jacket	CE	0.077 in	1.96 mm	392°F	200°C
019	Lightweight, Blue Silicon Jacket	CE	0.068 in	1.73 mm	500°F	260°C
036	General Purpose, Blue Silicon Jacket	CE	0.104 in	2.64 mm	392°F	200°C
078	General Purpose, Blue Polyurethane Jacket	CE	0.119 in	3.02 mm	185°F	85°C
Hardline Cable						
013	Hardline, 2-conductor, Inconel Jacket		0.125 in	3.20 mm	1200 °F	650 °C
023	Hardline, Coaxial, 304L Stainless Steel Jacket		0.059 in	1.5 mm	1200 °F	650 °C
Miscellaneous Cable						
031	Red/White Twisted Pair, PTFE Jacket		0.03 in*	0.8 mm*	392°F	200°C
037	10-cond. Shielded, Black Poly Jacket		0.024 in	0.61 mm	250°F	121°C

* diameter of each conductor

The combination of cables and connectors listed are only recommended configurations; other configurations may be available. Consult PCB® before ordering.

CE designates that cable maintains CE conformance

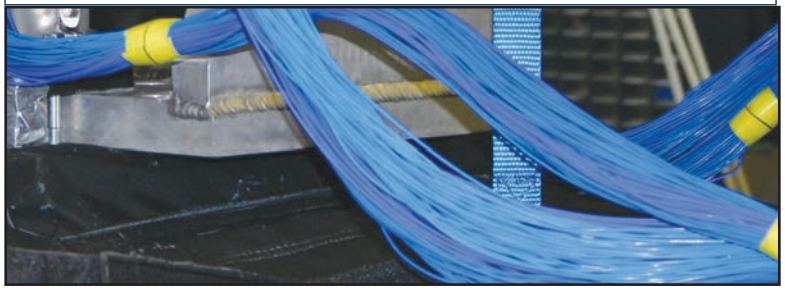

Connector Types

Coaxial Cable Connectors	
EB	10-32 Plug
EJ	10-32 Plug (Spring Loaded)
AH	10-32 Plug (Hex)
AK	10-32 Plug (Right-Angle)
AW	10-32 Plug (Solder Adaptor)
FZ	10-32 Plug (for 023 Hardline Cabling)
AL	10-32 Jack
GA	10-32 Jack (for 023 Hardline Cabling)
AG	5-44 Plug
AF	5-44 Plug (Right-Angle)
EK	3-56 Plug
EP	M3 Plug
AC	BNC Plug
AB	BNC Jack
FW	SMB Plug
FX	SMB Jack
Multi-Lead Connectors (For Triaxial Sensors)	
AY	4-Socket Plug
CA	4-Pin Jack
EH	4-Socket Miniature Plug
HJ	4-Pin Miniature Jack
EN	9-Socket Plug
GJ	9-Pin Plug
JY	Splice Assembly to (3) EB Connectors
LA	Splice Assembly to (3) EJ Connectors
JZ	Splice Assembly to (3) AL Connectors
JW	Splice Assembly to (3) AC Connectors
JX	Splice Assembly to (3) AB Connectors
JS	Splice Assembly to (3) AY Connectors
Miscellaneous Connectors	
AE	2-Socket Plug MS3106 5/8-24 thd (with Environmental Boot)
AM	2-Socket Plug MS3106 5/8-24 thd
AP	2-Socket Plug MS3106 5/8-24 thd (with Strain Relief)
BP	2-Socket Plug MS3106 5/8-24 thd (High Temperature)
ET	2-Socket Plug MIL 7/16-27 thd (High Temperature)
GN	2-Socket Plug MIL 7/16-27 thd (for 013 Hardline Cabling)
GP	2-Pin Jack MIL 7/16-27 thd (for 013 Hardline Cabling)
LN	8-Pin Mini DIN (for 4-Wire Bridge)
BZ	Blunt Cut
DZ	Pigtail (Leads Stripped and Tinned for 3711/3713 Series)
JJ	Pigtail (Leads Stripped and Tinned for 3741 Series)
AD	Pigtail (Leads Stripped and Tinned for all Others)

Cable Connectors

AB **BNC Jack**
Max Temp 329 °F (165 °C)

AC **BNC Plug**
Max Temp 329 °F (165 °C)

AD **Pigtail** (leads stripped and tinned)
Max Temp 490 °F (254 °C)*

AE **2-Socket MS3106 Plug** (with environmental boot)
Max Temp 325 °F (163 °C)

AF **5-44 Coaxial Plug** (right angle)
Max Temp 392 °F (200 °C)

AG **5-44 Coaxial Plug** (straight)
Max Temp 500 °F (260 °C)

AH **10-32 Coaxial Plug** (straight, with wire locking hex)
Max Temp 450 °F (232 °C)

AK **10-32 Coaxial Plug** (right angle)
Max Temp 329 °F (165 °C)

AL **10-32 Coaxial Jack** (straight)
Max Temp 500 °F (260 °C)

AP **2-Socket MS3106 Plug** (with strain relief)
Max Temp 257 °F (125 °C)

AW **10-32 Coaxial Plug / Solder Adaptor** (user repairable)
Max Temp 500 °F (260 °C)*

AY **4-Socket Plug, 1/4-28 Thread** (for triaxial sensors)
Max Temp 325 °F (163 °C)

CA **4-Pin Jack, 1/4-28 Thread** (for triaxial sensors)
Max Temp 325 °F (163 °C)

EB **10-32 Coaxial Plug** (straight)
Max Temp 500 °F (260 °C)

EH **4-Socket Mini Plug, 8-36 Thread** (for triaxial sensors)
Max Temp 356 °F (180 °C)

EJ **10-32 Coaxial Plug** (straight, o-ring seal, spring loaded)
Max Temp 500 °F (260 °C)

EK **3-56 Coaxial Plug**
Max Temp 500 °F (260 °C)

EN **9-Socket Plug** (for triaxial capacitive accelerometers)
Max Temp 275 °F (135 °C)

EP **M3 Coaxial Plug**
Max Temp 500 °F (260 °C)

ET **2-Socket Plug, 7/16-27 Thread**
Max Temp 500 °F (260 °C)

FZ **10-32 Coaxial Plug** (for hardline cable)
Max Temp 900 °F (482 °C)

GA **10-32 Coaxial Jack** (for hardline cable)
Max Temp 550 °F (288 °C)

GN **2-Socket Plug, 7/16-27 Thread** (high temperature)
Max Temp 900 °F (482 °C)

GP **2-Pin Jack, 7/16-27 Thread** (high temperature)
Max Temp 900 °F (482 °C)

*Max Temp may be less depending upon cable application.

Custom Cable Assemblies

PCB® offers many standard cable assemblies, however, in the event that a standard cable assembly will not fulfill the requirements of the application, the ability to configure a custom cable assembly is offered. Start by ensuring compatibility of the connector type with the cable type desired from the chart below, and then configure the custom cable model number from the steps on the previous page.

Cable - Connector Compatibility Matrix

The following table provides compatibility information for cables and cable connectors. A "✓" denotes compatibility of the connector type shown in the rows going down the table with the cable type of the intersecting column going across the table.

Coaxial Custom Cable Assemblies

Cable	002	003	005	006	012	013	018	023	024	030	031	032	038	045	053	098
Connector																
AB	✔	✔	✔	✔	✔		✔		✔	✔	✔	✔	✔	✔	✔	✔
AC	✔	✔	✔	✔	✔		✔		✔	✔	✔	✔	✔	✔	✔	✔
AD	✔	✔	✔	✔	✔		✔		✔	✔	✔	✔	✔	✔	✔	✔
AE		✔			✔				✔						✔	
AF	✔	✔	✔	✔			✔			✔						
AG	✔	✔	✔	✔			✔			✔	✔	✔	✔			✔
AH	✔	✔	✔	✔			✔			✔		✔				
AK	✔	✔	✔	✔			✔			✔		✔	✔			✔
AL	✔	✔	✔	✔			✔			✔	✔	✔				✔
AP	✔	✔	✔	✔	✔				✔			✔	✔	✔	✔	
AW											✔					
BP	✔	✔		✔									✔	✔	✔	✔
BZ	✔	✔	✔	✔	✔		✔		✔	✔	✔	✔	✔	✔	✔	✔
EB	✔	✔	✔	✔			✔			✔	✔	✔	✔			✔
EJ	✔	✔	✔	✔			✔			✔		✔	✔			✔
EK										✔						
EP	✔	✔	✔	✔			✔			✔						
ET														✔	✔	
FW	✔	✔	✔	✔			✔			✔						
FX	✔	✔														
FZ								✔								
GA								✔								
GN						✔										
GP						✔										

Multi-conductor Custom Cable Assemblies

Cable	010	019	034	036	037	078
Connector						
AD	✔	✔	✔	✔	✔	✔
AY	✔	✔	✔	✔		✔
BZ	✔	✔	✔	✔	✔	✔
CA	✔	✔	✔	✔		✔
DZ	✔		✔		✔	✔
EH		✔	✔			
EN					✔	
GJ					✔	
HJ			✔			
JJ	✔					
JS					✔	
JW	✔	✔	✔	✔		✔
JX	✔	✔	✔	✔		✔
JY	✔	✔	✔	✔		✔
JZ	✔	✔	✔	✔		✔
LA	✔	✔	✔	✔		✔

Multi-conductor Cables

Multi-conductor cables minimize tangles and reduce overall cable costs. They also offer numerous cable/termination variations to suit a particular transmission requirement, as well as the ability to consolidate several cables into one. These cables are wired for PCB 481A signal condtioners and patch panels.

Model 009H "xx"
Shielded ribbon cable
DB50 female to DB50 male
Specify "xx" length in feet

Model 009B "xx"
Ruggedized
Shielded multi-conductor cable
DB50 female to DB50 male
Specify "xx" length in feet

Model 009A "xx"
Ruggedized
Multi-conductor cable
DB50 female to 16 BNC Plugs
Specify "xx" length in feet

Patch Panels

Input patch panels serve as a central collection point for individual sensor cables installed in multi-channel measurement arrays. The sensor signal paths are then consolidated and transmission to readout or data acquisition equipment is accomplished by a single, multi-conductor cable.

Output patch panels connect via multi-conductor cables to the output connectors on high density rack or modular signal conditioners. The sensor signal paths are then expanded to individual BNC's for each channel for subsequent connection to data acquisition equipment.

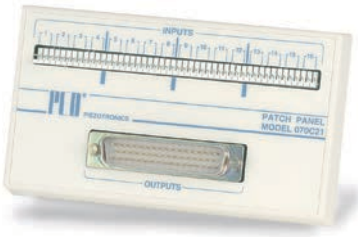

Model 070C21
16-channel input patch panel
16 IDC pin inputs
DB50 male output

Model 070C29
16-channel input patch panel
16 BNC jack and
16 IDC pin inputs
DB50 male output

Model 070A33
32-channel input patch panel
32 BNC jack and 32 IDC pin inputs
2 DB50 male outputs
Rack mount

Model 070A34
32-channel output patch panel
2 DB37 male inputs
4 DB37 female servo inputs
4 DB50 male HP outputs
32 BNC jack outputs
Rack mount

Connector Adaptors

070A02

Scope Input Adaptor
10-32 coaxial jack to BNC plug. For adapting BNC connectors for use with 10-32 coaxial plugs.

070A03

Connector Adaptor
10-32 coaxial plug to BNC jack. Converts 10-32 connectors for use with BNC plugs. Do not use on sensor connectors.

070A05

10-32 Coaxial Coupler
10-32 coaxial jack to 10-32 coaxial jack. Joins two cables terminating in 10-32 coaxial plugs.

070A08

Cable Adaptor
10-32 coaxial jack to BNC jack. Joins cables terminating in a BNC plug and a 10-32 coaxial plug.

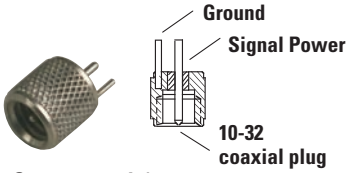

070B09

Solder Connector Adaptor
10-32 coaxial plug to solder terminals. Excellent for high-shock applications. User-repairable.

BNC T Connector 070A11
BNC plug to two BNC jacks. Used as a cable splitter.

BNC Coupler 070A12
BNC jack to BNC jack. Joins two cables terminating in BNC plugs.

1/8 in max wall thickness
1/2 in mtg thd

Feed-thru Adaptor 070A13
10-32 coaxial jack to BNC jack. Bulkhead connects BNC plug to 10-32 coaxial jack.

1/4 in max wall thickness
5/16-32 in mtg thd

10-32 Hermetic Feed-thru 070A14
10-32 coaxial jack to 10-32 coaxial jack.

10-32 Coaxial Right Angle Adaptor 070A20
10-32 coaxial jack to 10-32 coaxial plug. For use in confined locations. For ICP® sensors only.

085A18

Plastic Protective Cap
Provides strain relief for solder connector adaptors, as well as protects 10-32 cable ends.

085A40

10-32 Coaxial Shorting Cap
Used to short charge output sensor connectors during storage and transportation.

076A05

10-32 Coaxial Plug
Microdot connector, screw-on type.

076A25

Connector Tool
Used to install 076A05 screw-on type microdot connector.

EB

Coaxial Connector
10-32 crimp-on style coaxial connector. Requires tools contained in Model 076C31 kit.

076C31

10-32 Coaxial Crimp-on Connector Kit
Includes 1 pin insertion tool, 1 sleeve-crimping tool, and 20 Model "EB" connectors with cable strain reliefs. (Wire stripper and soldering iron not included).

Services and Qualifications

Lifetime Warranty Plus / Total Customer Satisfaction – PCB® Piezotronics, Inc. guarantees Total Customer Satisfaction through its "Lifetime Warranty Plus", Toll-Free Customer Service, and 24-hour SensorLine℠. Contact PCB® for a complete statement of our warranty or view our warranty online at http://www.pcb.com/feedback/tcsg_statement.php.

Toll-Free Customer Service – PCB® offers direct, toll-free telephone numbers for customer use. Specific numbers are available for the area in which your product interest lies. When uncertain, call our general number at 800-828-8840. Customer Service Representatives and Application Engineers are available to assist with requests for product literature, price quotations, discuss application requirements, orders, order status, expedited delivery, troubleshooting equipment, or arranging for returns. Our general fax number is: 716-684-0987. We look forward to hearing from you.

24-hour SensorLine℠ – PCB® offers to all customers, at no charge, 24-hour emergency product or application support, day or night, seven days per week, anywhere in the world. To reach a PCB® SensorLine℠ Customer Service Representative, call 716-684-0001.

Web site - www.pcb.com – Visit us online at www.pcb.com to view a broader selection of products, newly released products, complete product specifications, product drawings, technical information, and literature. Industrial vibration monitoring equipment can also be found on IMI Sensors' web site at www.imi-sensors.com. Sound level meters, noise dosimeters and acoustic measurement systems are featured on Larson Davis' web site at www.larsondavis.com.

AS9100 and ISO 9001 Certifications – PCB® is registered by the Underwriters Laboratory, Inc. as an AS9100 and ISO 9001 facility and maintains a quality assurance system dedicated to resolving any concern to ensure Total Customer Satisfaction. PCB® also conforms to the former MIL-STD-45662 and MIL-Q-9858.

PCB® Contact Guide

USA Toll-Free Customer Service:
866-816-8892

International Customers:
716-684-0001

Fax:
716-684-0987

E-mail:
aerosales@pcb.com

PCB® Web Site:
www.pcb.com/aerospace

PCB® 24-Hour SensorLine℠:
716-684-0001

A2LA Accredited Calibration Facility – PCB Piezotronics microphones, accelerometers, pressure and force transducers are calibrated with full traceability to NIST (National Institute of Standards & Technology) to ensure conformance to published specifications. Certificates of calibration are furnished which include actual measured data. Calibration systems utilized are kept in full compliance with ISO 9001:2000 standards. Calibration methods are accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories, as well as AS9100 and ISO 10012-1 standards. PCB® also meets requirements of ANSI/NCSL Z540-1-1994 and any additional program requirements in the field of calibration.

Delivery Policy – PCB® is committed to making every effort possible to accommodate all delivery requests. Our extensive in-house production capabilities permit us to manufacture most products to order in a timely fashion. In the event that a specific model is unavailable in the time frame that you need, we can usually offer a comparable unit, for sale or loan, to satisfy your urgent requirements. Many products are available from stock for immediate shipment. Standard cable assemblies and accessory hardware items are always stocked for immediate shipment and PCB® never requires a minimum order amount. If you have urgent requirements, call a factory representative and every effort will be made to fulfill your needs.

Custom Products – PCB® prides itself on being able to respond to customers' needs. Heavy investment in machinery, capabilities, and personnel allow us to design, test, and manufacture products for specialized applications. Please contact us to discuss your special needs.

CE Marking CE – Many PCB® products are designed, tested, and qualified to bear CE marking in accordance with European Union EMC Directive. Products that have earned this qualification are so indicated by the CE logo.

Hazardous Area Use – Certain equipment is available with ATEX and/or CSA certifications to enable use in hazardous environments. Contact PCB® for detailed specifications, which will identify the specific approved environments for any particular model.

Accuracy of Information – PCB® has made a reasonable effort to ensure that the specifications contained in this catalog were correct at the time of printing. In the interest of continuous product improvement, PCB® reserves the right to change product specifications without notice at any time. Dimensions and specifications in this catalog may be approximate and for reference purposes only. Before installing sensors, machining any surfaces, or tapping any holes, contact a PCB® application specialist to obtain a current installation drawing and the latest product specifications.

Routine Modification of Standard Models – In addition to the product options noted in our catalogues, customers from all business sectors regularly request adjustments for their specific implementation and measurement needs. PCB® has accommodated customers by making numerous standard adjustments to thousands of sensors, as well as to associated electronics. These adjustments to sensitivity, range, frequency response, resolution, grounding issues, mounting, cabling, and electrical requirements can often be made for a certain premium over the base model.

Stock Products – For the added convenience of our customers, PCB® offers a wide selection of sensors and instrumentation as stock products, available in-house and off the shelf, competitively priced with expedited delivery. These products have been identified and stocked based upon customer demand, with models that offer reliability and versatility across multiple application environments. We also manufacture custom products made to your requirements. We invite our customers to work with our Applications Engineers in evaluating your application first, to see if we might have a stock product alternative that fits your requirements with a short delivery time.

PCB, ICP, IMI with associated logo, TORKDISC, and Modally Tuned are registeres trademarks of PCB Group, Inc. Sensorline is a service mark of PCB Group, Inc.

PCB Piezotronics corporate headquarters,
located at 3425 Walden Avenue, Depew, NY, USA

PCB PIEZOTRONICS INC.
MTS SYSTEMS CORPORATION

With more than 40 years of products, innovation and customer service, PCB Piezotronics is a global leader in the design and manufacture of force, torque, load, strain, pressure, acoustic, shock and vibration sensors, as well as the pioneer of ICP® technology. Core competencies include ICP® and charge output piezoelectric, piezoresistive, strain gage, MEMS and capacitive sensors and instrumentation.

To address the growing need for sensors and related instrumentation in the target market areas of test & measurement, industrial vibration, automotive, aerospace & defense, environmental noise monitoring and industrial hygiene, PCB® has established a series of focused divisions, with dedicated sales, marketing, engineering, and customer service resource support tailored to the needs of customers in these very specific areas. PCB® divisions and their core competencies include:

IMI SENSORS
A PCB PIEZOTRONICS DIV.

IMI Sensors designs and manufactures a full line of accelerometers, sensors, vibration switches, vibration transmitters, cables and accessories for predictive maintenance, continuous vibration monitoring, and machinery and equipment protection. Products include rugged industrial ICP® accelerometers; 4-20 mA industrial vibration sensors and transmitters for 24/7 monitoring; electronic and mechanical vibration switches; the patented Bearing Fault Detector, for early warning of rolling element bearing faults; high temperature accelerometers to +900 °F (+482 °C); 2-wire Smart Vibration Switch, with MAVT™ technology, which automatically sets trip level; and the patented Reciprocating Machinery Protector, which outperforms conventional impact transmitters. CE approved and intrinsically safe versions are available for most products. Toll-free 1-800-959-4464; email: imi@pcb.com; www.imi-sensors.com

LARSON DAVIS
A PCB PIEZOTRONICS DIV.

Larson Davis Environmental Noise Monitoring and Industrial Hygiene offers a full line of Noise and Vibration measurement instrumentation, including Type 1 sound level meters, personal noise dosimeters, octave band, audiometric calibration systems, microphones and preamplifiers, hearing conservation software, and Human Vibration Exposure Monitor for Hand-Arm/Whole Body Vibration for evaluating human exposures to ISO 2631 and 5349, as well as to help ensure compliancy with a number of ANSI and OSHA and other related industrial hygiene standards, as well as for measurement of building acoustics, community and environmental noise monitoring, as well as supporting various automotive, aerospace and industrial applications. Toll-free 1-888-258-3222; email: sales@larsondavis.com; www.larsondavis.com

PCB PIEZOTRONICS INC.
MTS SYSTEMS CORPORATION

PCB Piezotronics Test & Measurement Products supports the application of traditional sensor technologies of acoustics, pressure, force, load, strain, torque, acceleration, shock, vibration, electronics and signal conditioning within product design and development, consumer product testing, quality assurance, civil structure monitoring, research and development, education and engineering application areas.

Visit **www.pcb.com** for more details

THE MODAL SHOP
MTS SYSTEMS CORPORATION

The Modal Shop, Inc. (www.modalshop.com) specializes in multi-channel sound and vibration sensing systems for lab measurements and industrial process monitoring, including calibration systems and test and measurement equipment rental. Also, smart sensing systems applied to parts quality NDT analysis, process monitoring and machinery gauging. Toll-free in USA: 800-860-4867, Phone: 513-351-9919

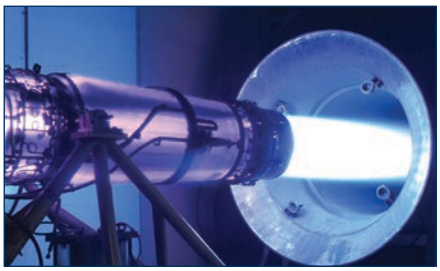

The Global Leader in Sensors and Instrumentation For All Your Applications

IMI SENSORS
A PCB PIEZOTRONICS DIV.
Toll-Free in USA 800-959-4464
E-mail imi@pcb.com

LARSON DAVIS
A PCB PIEZOTRONICS DIV.
Toll-Free in USA 888-258-3222
E-mail sales@larsondavis.com

THE MODAL SHOP
MTS SYSTEMS CORPORATION
Toll-Free in USA 800-860-4867
E-mail info@modalshop.com

PCB PIEZOTRONICS INC.
MTS SYSTEMS CORPORATION
3425 Walden Avenue, Depew, NY 14043-2495 USA
Toll-Free in USA 866-816-8892
24-hour SensorLine℠ 716-684-0001
Fax 716-684-0987 **E-mail** aerosales@pcb.com
Web Site www.pcb.com

AS9100 CERTIFIED ■ ISO 9001 CERTIFIED ■ A2LA ACCREDITED to ISO 17025

© 2017 PCB Piezotronics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. SensorLine℠ is a service mark of PCB Piezotronics, Inc.

AD-EXPLOSIVE-GUN-IMPACT-0817 Printed in U.S.A.

PCB PIEZOTRONICS is a designer, manufacturer, and global supplier of accelerometers, microphones, force, torque, load, strain, and pressure sensors, as well as the pioneer of ICP® technology. This instrumentation is used for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. Our Platinum Stock Sensors program ensures fast shipment of over 10,000 sensors that are covered by a Lifetime Warranty. With a support team of Customer Service Representatives and Application Engineers, PCB® proudly stands behind their products with the services you value most, including 24-hour technical support, a global distribution network, and the industry's only commitment to **Total Customer Satisfaction.** Visit us at www.pcb.com for more information.

Visit **www.pcb.com** *to locate your nearest sales office*

Vertrieb für Österreich:

www.nbn.at

nbn Elektronik Handelsgesellschaft m.b.H.
Riesstraße 146, 8010 Graz | Tel. +43 316 40 28 05 | Fax +43 316 40 25 06